SLIDING & FOLDING HARDWARE

Sliding & Folding Hardware allows space previously required for swing clearance can now be better utilized for decor or to give a more open feel.

PEMKO is the North American distributor for sliding and folding door hardware manufactured by P.C. Henderson. PEMKO has created hardware solution kits with all the components needed to complete a project, except for the actual door. The warranty on P.C. Henderson products is 2 years.

PEMKO also provides several solution kits of its own including the Pocket Frame Kit, Side Wall Track System, and Bypass Track System. The warranty on PEMKO manufactured products is 5 years.

Select your solution kit based on the door weight, size, mounting (overhead or side wall), sliding or folding, and any special characteristics of the particular opening such as the need for a low profile system. Kits are offered for doors weighing 180 lbs up to 1100 lbs.



CONTENTS:	
H180A Series	
SHS80 Series	
Sliding 200 Series	SF-4
Side Wall Track System	SF-5
Bypass Track Series	SF-6
SIM200A Series	
LP200 Series	SF-8
Sirocco Series	
H300S-OH Series	SF-10
H300S-SW Series	SF-11
H440A-OH Series	SF-12
H440A-SW Series	SF-13
H600S-OH Series	SF-14
H600S-SW Series	SF-15
H800S-OH Series	SF-16
H800S-SW Series	SF-17
H1100A-OH Series	SF-18
H1100A-SW Series	SF-19
Sliding Glass Series	SF-20
Pocket Frame Kit	SF-21
Folding 100 Series	SF-22
Pacer Interior End Fold Series	
Flexirol Interior End Fold Series	
Options & Accessories	

INDEX:

PRODUCT	PAGE
280	SF 4
281	SF-3, SF-4, SF 7,
	SF-20, SF-22
283	SF-22
284	SF-4-SF-7
286	SF-4 SF-6
290	SF-10, SF-11
301	SF-14-SF-17
608	SF-20
610	SF-20
2812	SF-6
102NSF-2 S	F-8, SF-10 SF-17
102WA	SF-2 SF-7, SF-11,
	SF-13, SF-17
102WN	SF-2 SF-5, SF-7,
SF-	11, SF-13, SF-15,
	SF-15, SF-17
106HF/94	SF-22
106R/94	SF-3 , SF-8,
	SF-10 SF-19
1075C	SF-2
1076A	SF-2
1A/290	SF-11
1A/290/EC	SF-10, SF-11
1A/301	SF-15, SF-17

PRODUCT PAGE
1A/301/ECSF-14 SF-17
1A/550SF-19
1BSF-13
21/550/PSF-24
21B/PSF-23
21BO/4SF-23
21N/94SF-23
21R/94SF-24
280_ SWF SF-5
280SWTSF-5
2802ASF-6
2802BTSF-6
280ASF-3, SF-4, SF-7,
SF-9, SF-20, SF-22
280ANSF 8
280C-SWTKITSF-5
280D-SWTKITSF-5
281ASF-8
282HD SF-22
284DSF-20
287HD SF-2, SF-4, SF-6
289BSF-22
289TSF-22
3A/290SF-10
5/ 02/ 0111111111111111111111111111111111

GE	PRODUCT PAGE
-17	403/2SF-23, SF-24
-19	550ASF-18, SF-19, SF-24
-13	556/21SF-24
-24	556/57SF-18, SF-19
-23	57A/NSF-16, SF-27
-23	57A/SSF-14, SF-15
-23	57BSF-12, SF-13
-24	57K/NSF-10, SF-11
SF-5	600ASF-12, SF-13, SF-23
SF-5	601HSF-3, SF-7, SF-20
SF-6	601PSF 12, SF-13
SF-6	8/10/75 HUSKY SF-20
SF-7,	89/2NSF-10-SF-19
-22	94ASF-2 SF-8,
SF 8	SF-10-SF 13-SF-19, SF-22-SF 24
SF-5	971ASF-3, SF-4, SF-7, SF-8,
SF-5	SF-10, SF-12, SF-14, SF-16,
SF-8	SF-18, SF-20, SF-22, SF-24
-22	DELLHSF-9
-20	DELRHSF-9
SF-6	F134SF-6
-22	F134CSF-2-SF-4, SF-7
-22	F136SF-20
-10	F160CSF-12
-16	F160ECPSF-12

PRODUCT		PRODUCT	
F200C		LH100	
F200ECP	SF-13	LP200A	SF-8
FIF2/275A	SF-24	PF134 KIT	SF-21
H100/200 Pack	SF-4-SF-6	PF28200A	SF-21
H1100A-OH	SF 18	PFAS	SF-21
H1100A-SW	SF-19	PFAS100	SF-21
H180A	SF-2	PFAS88	SF-21
H200A	SF-4	PFBG-4	SF-21
H222-45SF	-2, SF-3, SF-21	PFBG-8	SF-21
H300S-OH	SF-10	PFBS	SF-21
H300S-SW	SF-11	PFCDKIT	SF-21
H440A-OH	SF-12	PFFC-8	SF-21
H440A-SW	SF-13	PFHB-1	SF-21
H600S-OH	SF-14	PFHB-2	SF-21
H600S-SW	SF-15	PFHS	SF-21
H800S-OH	SF-16	PFKIT-4	SF-21
H800S-SW	SF-17	PFKIT-8	SF-21
HBP200A	SF-6	PIF2/165A	SF-23
HF2/100A	SF-22	PIF4/165A	SF-23
HF4/100A	SF-22	SHS80	SF-3
HH3/290	SF-10, SF-11	SIM100	SF-7
HH3/301	SF-14 SF-19	SIM200A	SF-7
K1077C-SWEP	SF-2	SIRF/2500	SF-9
K134EP	SF-4, SF-7	SIRLH	SF-9
K28SWEP	SF-5	SIRRH	SF-9

Copyright © 2012, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved.

Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.

PEMKC ASSA ABLOY


800-824-3018 www.pemko.com

H180A Series


For Sliding Panels up to 180 lbs.

Manufactured by PEMKO

Overhead Mount

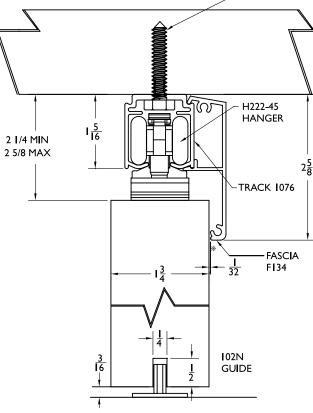

Side Wall Mount

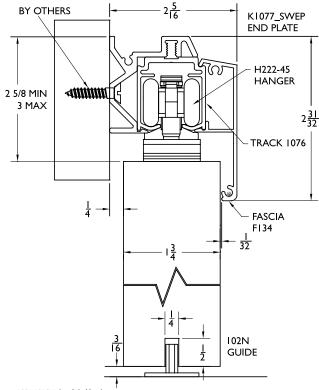

Configurations: Installations:

- Overhead Mount
- Single • Bi-parting • Side Wall Mount

Features:

BY OTHERS

- Hanger body is made of nickel plated zinc alloy for durability and long life
- Zinc alloy ball bearing wheels coated in nylon for smooth operation
- 180 lb. panel capacity
- Optional side wall bracket reduces the amount of wall space needed to mount the track

H180A Kits Include:

- 1 ea 1076A Mill Finished Aluminum Track
- 2 ea H222-45 Hanger - Nickel Plated Zinc Alloy Body Zinc Alloy Wheels Coated in Nylon
- 287HD Rubber Bumper In-Track Stop 2 ea
- 102N White Nylon Mortise Guide 1 ea

Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H180A/6	Aluminum	72"	36"
H180A/8	Aluminum	96"	48"
H180A/10	Aluminum	120"	60"
H180A/12	Aluminum	144"	72"

Options: See page SF-25

Fascia	F134C
Side Wall Track Bracket	1075C Clear anodized aluminum
	bracket- order same length as track
End Plate Kit	K1077C-SWEP (Use with F134C Fascia
	and 1075C Side Wall Bracket only)
Bottom Channel	94A
Roller Guide	106R/94
Threshold	971A
Side Wall Mount	102WN (nylon) and 102WA (steel)
Mortise Guides	

* When using fascia, offset hanger foot 1/8" closer to fascia face of the door.


🍪 PEMKC

ASSA ABLOY

SHS80 Series

For Sliding Panels up to 180 lbs. Manufactured by PEMKO

Overhead Mount

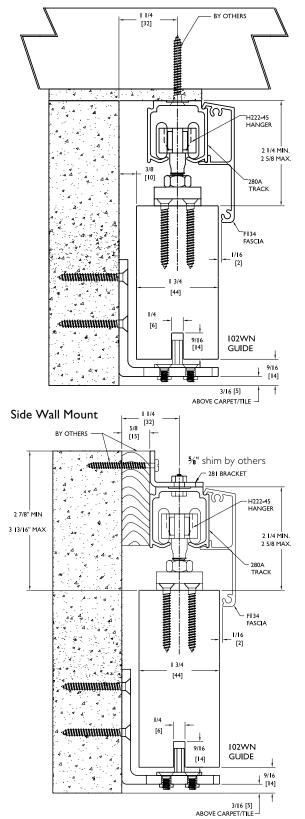

Copyright © 2012, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.

Installations: Configurations: Overhead Mount

- Single
- Bi-parting

Features:

• Hanger body is made of nickel plated zinc alloy for durability and long life

• Side Wall Mount

- · Zinc alloy ball bearing wheels coated in nylon for smooth operation
- 180 lb. panel capacity

SHS80 Kits Include:

- 280A Mill Finished Aluminum Track 1 ea
- H222-45 Hanger Nickel Plated Zinc Alloy Body 2 ea
- 601H Nylon In-Track Clip Stop 2 ea
- 102WN White Nylon Mortise Guide on Zinc Plated Steel 1 ea ''L'' Metal


	Standard Kit Sizes			
Part Nu	mber	Material	Track Length	Door Width
SHS80/6	,	Aluminum	72"	36"
SHS80/8	3	Aluminum	96"	48"

Fascia	F134C
Side Wall Track Brackets	281 available as 5 pack only, 2815
	Note: Need one at each end and no
	more than 3 feet in between.
	Fasteners included
Bottom Channel	94A
Roller Guide	106R/94
Threshold	971A
Side Wall Mount	
Mortise Guides	102WA
Mortise Floor Guide	102N




800-824-3018 www.pemko.com

Sliding 200 Series




Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H200A/4	Aluminum	48"	24"
H200A/5'4	Aluminum	64"	32"
H200A/6	Aluminum	72"	36"
H200A/7	Aluminum	84"	42"
H200A/8	Aluminum	96"	48"
H200A/10	Aluminum	120"	60"
H200A/12	Aluminum	144"	72"
H200/6	Steel	72"	36"
H200/8	Steel	96"	48"

280A Side Wall Mounted

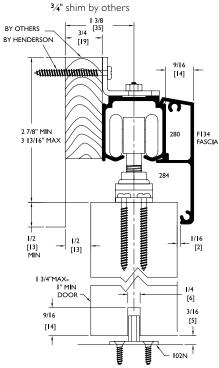

280 Overhead Mounted



I 7/8" 2 I/4"


> 971 THRESHOLD

(OPTIONAL)

1/2

ŧ

280A Soffit Mounted with Fascia



- Single
- Bi-parting
- Side Wall Mount

Overhead Mount

• Face/Face Fixed Mount with Fascia

1 ea

2 ea

1 ea

2 ea

1 ea

H100/200 PACK

Features:

- Needle bearing hangers for smooth operation
- 200 lb. panel capacity
- Galvanized steel track 280
- Aluminum track 280A

H200A Kits Include:

- 1 ea **280A** Aluminum Track
- 2 ea 284 Hangers
- 1 ea **102N** Nylon Guide
- 2 ea 286 Stops
- 1 ea Adjusting Wrench and Mounting Hardware

Options: See page SF-25

Hardware Kit Mounting Bracket

Track Stop (bumper) Bottom Channel Fascia, Snap-On Roller Guide Side Wall Mortise Guide Threshold End Plate

BY OTHERS

11/8

280

284 HANGER

STEEL TRACK Note: Need one at each end and no more than 3 feet in between. Fasteners included 287HD 94A

281 available as 5 pack only, 2815

H200 Kits Include:

284 Hangers

286 Stops

280 Steel Track

102N Nylon Guide

Adjusting Wrench and

Mounting Hardware

F134C in clear anodized (280A only) 106R/94 102WA (steel) and 102WN (nylon) 971A K134EP (Use with F134C and 280A only)

1/2

I06R/94 ROLLER GUIDE


(OPTIONAL)

SSA ABLOY

Side Wall Track (SWT) System

Manufactured by PEMKO

The PEMKO Side Wall Track System has a unique mounting bracket that is extruded with the track. An innovative wall mounted bottom guide assembly allows carpet to be replaced without removing the door.

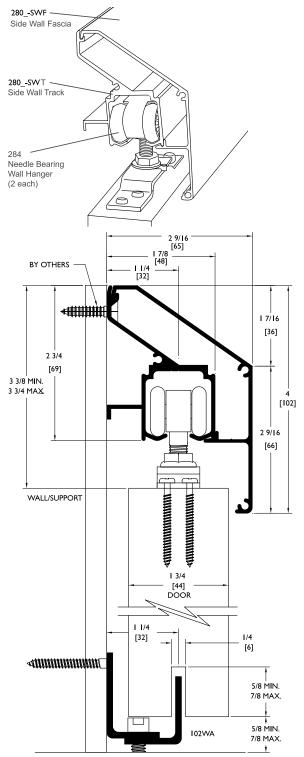


Configurations:

- Single
- Bi-parting

Features:

- Unique mounting bracket extruded into track
- Supports up to 200 lbs per door
- Quick, easy attachment
- No additional shims needed
- New construction or retrofit



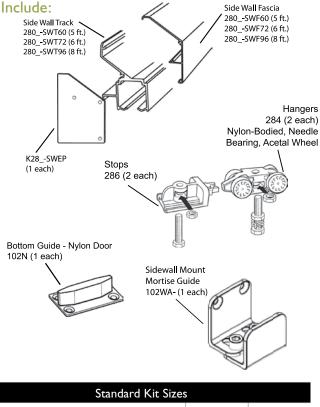

Standard Kit Sizes	5	
Part Number	Track Length	Door Width
(Mill Finished Track/Clear Anodized Fascia/End Plates)		
280C-SWTKIT/5	60"	30"
280C-SWTKIT/6	72"	36"
280C-SWTKIT/8	96"	48"
280C-SWTKIT/12*	144"	2@36"
(Dark Bronze Anodized Track/Fascia/End Plates)		
280D-SWTKIT/5	60"	30"
280D-SWTKIT/6	72"	36"
280D-SWTKIT/8	96"	48"
280D-SWTKIT/12*	144"	2 @ 36"

*NOTE: 280_-SWTKIT/12 comes with enough hardware for two doors.

Options: See page SF-25

Hardware Kit (one door) Roller Guide Bottom Channel Nylon Mortise Guide H100/200 pack 106R/94 94A 102WN

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart) A (Mill Finish Aluminum) C (Anodized Aluminum) D (Dark Bronze Anodized)

Copyright © 2012, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.



Bypass Track Series

For Bypass Panels up to 200 lbs. Manufactured by PEMKO


- Fits 13/8" and 13/4" doors
- Needle-bearing wheels for ultra smooth performance
- Load capacity 200 lbs. per door panel (2 hangers)
- Extruded aluminum track

HBP200A Kits Include:

1³/₈" Thick Doors

- 1 ea 2802A Mill Finished Aluminum Track
- 4 ea 284 White Hangers
- 2 ea 102N White Nylon Mortise Guide
- 4 ea 286 Stops
- 1 ea Adjusting Wrench and Mounting Hardware

Standard Kit Sizes			
Part Number	Track Length	Door Width	
HBP200A/4	48"	2 @ 24"	
HBP200A/5'4	64"	2 @ 32"	
HBP200A/6	72"	2 @ 36"	
HBP200A/7	84"	2 @ 42"	
HBP200A/8	96"	2 @ 48"	
HBP200A/10	120"	2 @ 60"	
HBP200A/12	144"	2 @ 72"	






* Side Wall mounting: use one (1) 2812 Kit per 3 ft. of track.

Options: See page SF-25

2802A

BYPASS TRACK

• • • •	
Hardware Kit	H100/200 pack
Mounting Bracket	2812
Track Stop (bumper)) 287HD
Bottom Channel	94A
Fascia, Snap-On	F134
Roller Guide	106R/94
Dual Guide Channel	2802BT

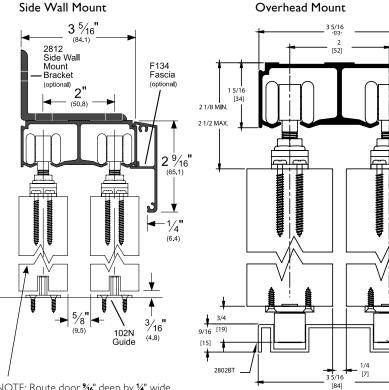

1³/₄" Thick Doors

NOTE: Route door $\%6^{\prime\prime}$ deep by $\%^{\prime\prime}$ wide to receive 102N Guide.

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart) A (Mill Finish Aluminum) C (Clear Anodized)

ASSA ABLOY, the global leader in door opening solutions $\begin{bmatrix} 10^{+3}_{-0} \end{bmatrix}$

106R/94

1/8

[4]

🍪 PEMKO


ASSA ABLOY


SIM200A Series

For Sliding Doors up to 48" wide and 200 lbs. Manufactured by P.C. Henderson

HENDERSON





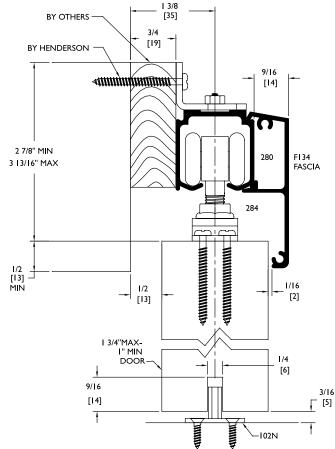

Copyright © 2012, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.

Simultaneous Action Unit (SIM) allows the simultaneous operation of two doors.

Configurations: Installations:

• Bi-parting Overhead Mount Side Wall Mount

Features:

- Allows individual bi-part doors to act as a single operating unit. When one door is opened or closed, the second door operates simultaneously
- 200 lb. panel capacity
- Needle bearing nylon wheels for smooth operation
- Mill finished aluminum track 280A

SIM200A Kits Include:

- 280A Mill Finished Aluminum Track 1 ea
- 284 White Nylon Hangers 4 ea
- 4 ea 601H Nylon In-Track Clip Stop
- 2 ea 102N White Nylon Mortise Guide
- SIM100 Cable and Pulley Kit 1 ea

Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
SIM200A/6	Aluminum	72"	2 @ 18"
SIM200A/8	Aluminum	96"	2 @ 24"
SIM200A/12	Aluminum	2 @ 72"	2 @ 36"
SIM200A/16	Aluminum	2 @ 96"	2 @ 48"


Options: See page SF-25

Fascia Side Wall Track Brackets F134C 281 available as 5 pack only, 2815 Note: Need one at each end and no more than 3 feet in between. Fasterners inlcuded. K134EP (Use with F134C only)

End Plates Bottom Channel Roller Guide Threshold

94A 106R/94 971A

Side Wall Mortise Guides 102WN (nylon) and 102WA (steel)

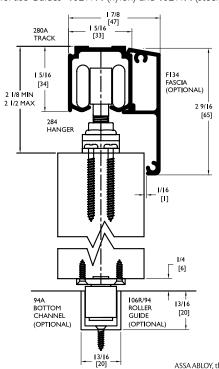


ASSA ABLOY, the global leader in door opening solutions

800-824-3018 www.pemko.com

LP200 Series

For Sliding Panels up to 200 lbs. Manufactured by P.C. Henderson HENDERSON

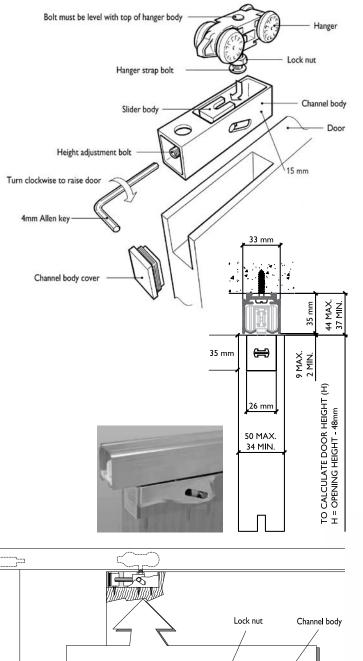

Low profile design for use where space is limited.

Overhead Mount

Configurations: Installations:

- Bi-partingSingle
 - Side Wall Mount

Features:

- Used to maximize door height
- Designed to give a modern clean finish with all parts concealed. Ideal for applications where minimal clearance between track and door is required
- Easy installation and adjustment
- 200 lb. panel capacity
- Needle bearing nylon wheels for smooth operation
- Mill finished aluminum track 280AN

LP200A Kits Include:

- 1 ea **280AN** Aluminum Track
- 1 ea LH100 Hardware Kit


LH100 Hardware Kits Include:

- 2 ea Low Head Room Units
- 2 ea End Caps
- 2 ea In-Track Clip Stops
- 1 ea Screw Pack
- 2 ea Low Head Room Hangers
- 1 ea 102N White Nylon Mortise Guide
- 1 ea Small Spanner and 4mm Allen Key

Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
LP200A/6	Aluminum	72"	36"
LP200A/8	Aluminum	96"	48"
LP200A/10	Aluminum	120"	60"

Options: See page SF-25

Side Wall Track Bracket	
Bottom Channel Roller Guide	94A 106R/94
Threshold	971A

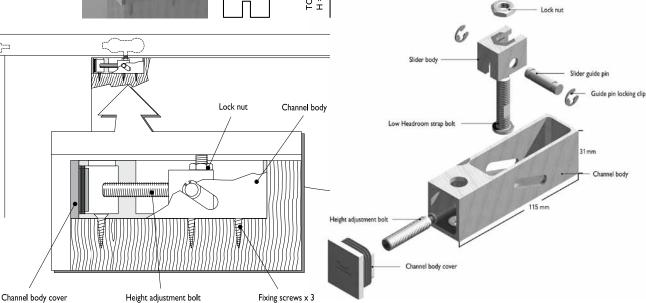

ASSA ABLOY, the global leader in door opening solutions Copyright © 2012, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.

SF-8


🏶 PEMKC

ASSA ABLOY

Sirocco Series

For Sliding Panels up to 200 lbs Manufactured by P.C. Henderson HENDERSON

Right Hand SIRRH Shown Above and Below

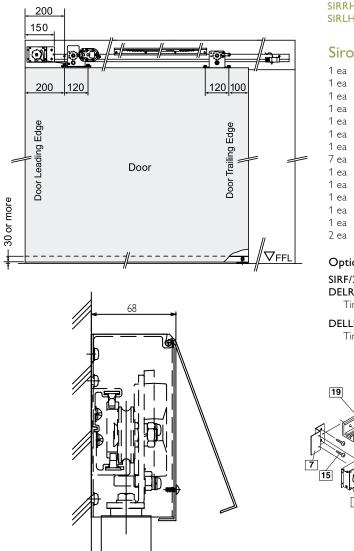

The Sirocco system is a quiet, user friendly self closing system which brings the door gently to a close.

The integrated hydraulic soft stop brings the door to a safe and cushioned close making it ideal for disabled access systems or public areas. The internal door brake can also be adjusted to allow the user to dictate the speed of opening preventing damage to the door and system.

Configurations: Installations:

• Single Side Wall Mount

Features:


- Self closing system for a single door from 311/2" to 471/4" wide and up to 200 lbs
- Interior applications only
- · Comes complete with a hydraulically controlled soft close feature • Adjustable closing speed
- Door brake to reduce opening speed to prevent damage to the door and system
- Optional hold open unit giving adjustable time delay before self closing
- Operational between temperature ranges of 50 to 104 degrees Fahrenheit

SIRRH	Right Hand Opening Kit
SIRLH	Left Hand Opening Kit

Sirocco Series Kits Include:

- 1 ea Track 86.61" long
- 1 ea Leading hanger
- Trailing hanger 1 ea
- 1 ea Hydraulic Control Unit
- Closing brake rack 1 ea
- Opening brake rack
- Power spring mounting bracket
- 7 ea Height adjustment plates
- Power spring unit
- Guide roller 1 ea
- 1 ea Opening door stop
- Door stop roller 1 ea
- Closing door stop 1 ea
- Wooden door plate. All required screws and bolts 2 ea






Copyright © 2012, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.

ASSA ABLOY, the global leader in door opening solutions



H300S-OH Series

For Sliding Panels up to 300 lbs. Manufactured by P.C. Henderson HENDERSON

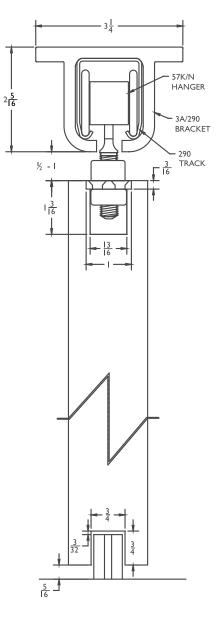

Configurations: Installations:

- Bi-parting Overhead Mount
- Single

Features:

- Overhead mount system
- Nylon wheels for smooth operation
- 300 lb. panel capacity
- Galvanized steel track 290

H300S-OH Kits Include:

- 1 ea 290 Galvanized Steel Track
- 3A/290 Aluminum Alloy Overhead Mount Track Brackets (One at each end and no more than 3 feet in between)
- 2 ea 1A/290/EC Aluminum Alloy End Caps
- 2 ea **57K/N** White Nylon Body and Wheels, Zinc Coated Steel Pendant Bolt Hangers
- 2 ea HH3/290 Galvanized Steel In-Track Stop
- 1 ea **89/2N** Gray Nylon Mortise Guide

Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H300S-OH/6	Steel	72"	36"
H300S-OH/8	Steel	96"	48"
H300S-OH/10	Steel	120"	60"
H300S-OH/12	Steel	144"	72"


Bottom Channel	94A
Roller Guide	106R/94
Threshold	971A
Mortise Guides	102N

SSA ABLOY

H300S-SW Series

For Sliding Panels up to 300 lbs. Manufactured by P.C. Henderson

Henderson

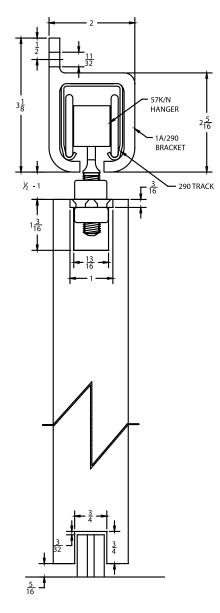

Configurations: Installations:

Side Wall Mount

- Bi-partingSingle

Features:

- Side wall mount system
- Nylon wheels for smooth operation
- 300 lb. panel capacity
- Galvanized steel track 290

H300S-SW Kits Include:

- 1 ea 290 Galvanized Steel Track
- 1A/290 Side Wall Mount Track Brackets (One at each end and no more than three feet in between)
- 2 ea **1A/290/EC** Aluminum Alloy End Caps
- 2 ea **57K/N** White Nylon Body and Wheels, Zinc Coated Steel Pendant Bolt Hangers
- 2 ea HH3/290 Galvanized Steel In-Track Stops
- 1 ea **89/2N** Gray Nylon Mortise Guide


Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H300S-SW/6	Steel	72"	36"
H300S-SW/8	Steel	96"	48"
H300S-SW/10	Steel	120"	60"
H300S-SW/12	Steel	144"	72"

Bottom Channel	94A
Roller Guide	106R/94
Mortise Guides	102N
Side Wall Mortise Guides	102WN (nylon) and 102WA (steel)

800-824-3018 www.pemko.com

H440A-OH Series

For Sliding Panels up to 440 lbs. Manufactured by P.C. Henderson $H\underline{\mathrm{END}\underline{\mathrm{E}}\mathrm{RSO}}N$

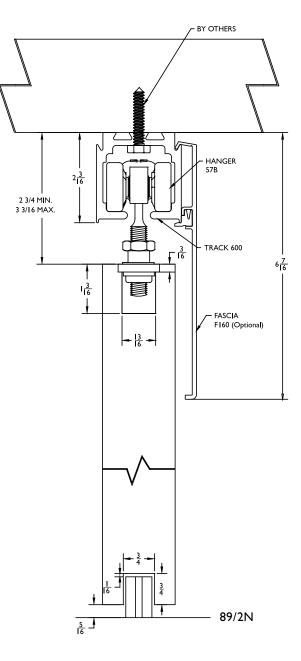

Configurations: Installations:

- Bi-parting Overhead Mount
- Single

Features:

- Overhead mount system
- Nylon body and steel ball bearing nylon wheels for smooth operation
- 440 lb. panel capacity
- Mill finished aluminum track 600A

H440A-OH Kits Include:

- 1 ea 600A Mill Finished Aluminum Track
- 2 ea **57B** Hangers: Gray Nylon Body, Zinc Coated Steel Pendant Bolt, Steel Ball Bearing Nylon Wheels
- 2 ea **601P** Nylon In-Track Clip Stop
- 1 ea **89/2N** Gray Nylon Mortise Guide

Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H440A-OH/6	Aluminum	72"	36"
H440A-OH/8	Aluminum	96"	48"
H440A-OH/10	Aluminum	120"	60"
H440A-OH/12	Aluminum	144"	72"

F160C

94A

Options: See page SF-25

Fascia
Bottom Channel
Roller Guide
Threshold
Mortise Guides
End Plate Kit

106R/94 971A 102N F160ECP (Used With F160C Fascia and 600A Track Only)


🍪 PEMKC

ASSA ABLOY

H440A-SW Series

For Sliding Panels up to 440 lbs. Manufactured by P.C. Henderson

HENDERSON

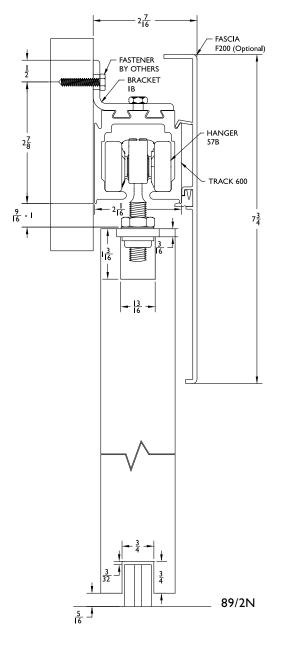

Installations: Configurations:

Side Wall Mount

• Bi-parting • Single

Features:

- Side wall mount system
- Nylon body and steel ball bearing nylon wheels for smooth operation
- 440 lb. panel capacity
- Mill finished aluminum track 600A

H440A-SW Kits Include:

- 1 ea **600A** Mill Finished Aluminum Track
- 1B Side Wall Mount Track Brackets
- (One at each end and no more than 3 feet in between) 57B Hangers: Gray Nylon Body, Zinc Coated Steel 2 ea
- Pendant Bolt, Steel Ball Bearing Nylon Wheels
- 2 ea 601P Nylon In-Track Clip Stop
- 89/2N Gray Nylon Mortise Guide 1 ea

Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H440A-SW/6	Aluminum	72"	36"
H440A-SW/8	Aluminum	96"	48"
H440A-SW/10	Aluminum	120"	60"
H440A-SW/12	Aluminum	144"	72"

F200C

94A

Options: See page SF-25

Fascia Bottom Channel Roller Guide Mortise Guides End Plate Kit


106R/94 102N Side Wall Mortise Guides 102WN (nylon) and 102WA (steel) F200ECP (Used With F200C Fascia and 600A Track Only)

Copyright © 2012, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.

800-824-3018 www.pemko.com

H600S-OH Series

For Sliding Panels up to 600 lbs. Manufactured by P.C. Henderson $H\underline{\mathrm{END}}\underline{\mathrm{ERSO}}N$

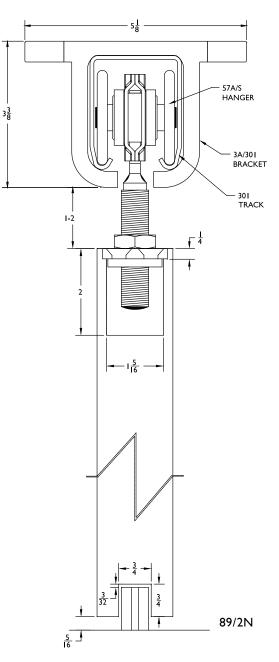

Configurations: Installations:

- Bi-parting
 Overhead Mount
- Single

Features:

- Overhead mount system
- Heavy duty zinc coated steel
- Ball bearing wheels
- 600 lb. panel capacity
- Galvanized steel track 301

H600S-OH Kits Include:

1 ea **301** Galvanized Steel Track

- 3A/301 Aluminum Alloy Overhead Mount Track Brackets (One at each end and no more than three feet in between)
 2 ea 1A/301/EC Aluminum Alloy End Caps
- 2 ea **57A/S** Zinc Coated Steel Body, Wheels, and Pendant Bolt Hangers
- 2 ea HH3/301 Galvanized Steel In-Track Stops
- 1 ea **89/2N** Gray Nylon Mortise Guide

Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H600S-OH/6	Steel	72"	36"
H600S-OH/8	Steel	96"	48"
H600S-OH/10	Steel	120"	60"
H600S-OH/12	Steel	144"	72"

Bottom Channel	94A
Roller Guide	106R/94
Mortise Guides	102N
Threshold	971A


🍪 PEMKO

ASSA ABLOY

H600S-SW Series

For Sliding Panels up to 600 lbs. Manufactured by P.C. Henderson

Henderson

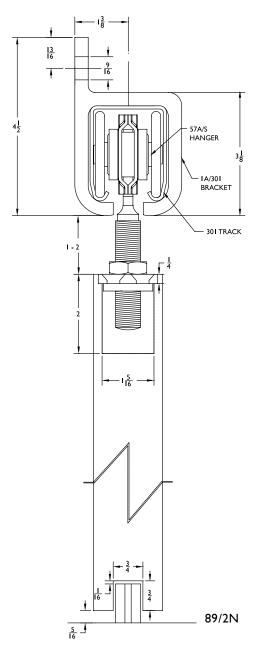

Configurations: Installations:

Bi-parting

Single

Features:

- Side wall mount system
- Heavy duty zinc coated steel
- Ball bearing wheels
- 600 lb. panel capacity
- Galvanized steel track 301

H600S-SW Kits Include:

- 1 ea **301** Galvanized Steel Track
- 1A/301 Side Wall Mount Track Brackets
- (One at each end and no more than three feet in between) 2 ea 1A/301/EC Aluminum Alloy End Caps

Side Wall Mount

- 2 ea **57A/S** Zinc Coated Steel Body, Wheels, and Pendant
- Bolt Hangers
- 2 ea HH3/301 Galvanized Steel In-Track Stops
- 1 ea **89/2N** Gray Nylon Mortise Guide


Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H600S-SW/6	Steel	72"	36"
H600S-SW/8	Steel	96"	48"
H600S-SW/10	Steel	120"	60"
H600S-SW/12	Steel	144"	72"

Bottom Channel	94A
Roller Guide	106R/94
Mortise Guides	102N
Side Wall Mortise Guides	102WN

800-824-3018 www.pemko.com

H800S-OH Series

For Sliding Panels up to 800 lbs. Manufactured by P.C. Henderson $H\underline{\mathrm{END}\underline{\mathrm{ERSO}}N}$

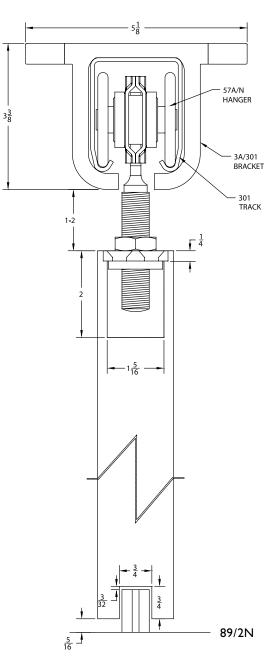

Configurations: Installations:

- Bi-parting
 Overhead Mount
- Single

Features:

- Overhead mount system
- Heavy duty zinc coated steel body
- Ball bearing nylon wheels for smooth operation
- 800 lb. panel capacity
- Galvanized steel track 301

H800S-OH Kits Include:

1 ea **301** Galvanized Steel Track

- **3A/301** Overhead Mount Track Brackets
- (One at each end and no more than three feet in between) 2 ea 1A/301/EC Aluminum Alloy End Caps
- 2 ea 57A/N Zinc Coated Steel Body, Nylon Wheels, and Pendant Bolt Hangers
- 2 ea HH3/301 Galvanized Steel In-Track Stop
- 1 ea 89/2N Gray Nylon Mortise Guide

Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H800S-OH/6	Steel	72"	36"
H800S-OH/8	Steel	96"	48"
H800S-OH/10	Steel	120"	60"
H800S-OH/12	Steel	144"	72"

Bottom Channel	94A
Roller Guide	106R/94
Mortise Guides	102N
Threshold	971A


🍪 PEMKC

ASSA ABLOY

H800S-SW Series

For Sliding Panels up to 800 lbs. Manufactured by P.C. Henderson

HENDERSON

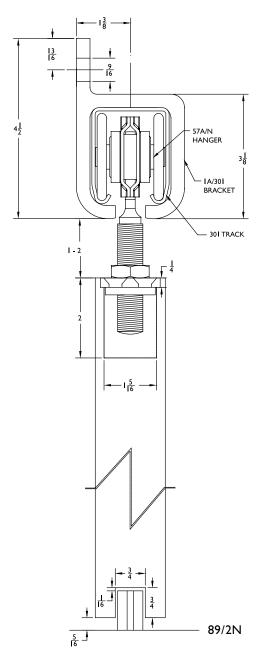

Configurations: Installations:

- Bi-parting • Single
- Side Wall Mount

Features:

- Side wall mount system
- Heavy duty zinc coated steel body
- Heavy ball bearing nylon wheels for smooth operation
- 800 lb. panel capacity
- Galvanized steel track 301

H800S-SW Kits Include:

- 1 ea **301** Galvanized Steel Track
- 1A/301 Aluminum Alloy Side Wall Mount Track Brackets (One at each end and no more than three feet in between) 2 ea 1A/301/EC Aluminum Alloy End Caps
- 2 ea 57A/N Zinc Coated Steel Body, Nylon Wheels, and Pendant Bolt Hangers
- 2 ea HH3/301 Galvanized Steel In-Track Stops
- 89/2N Gray Nylon Mortise Guide 1 ea


Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H800S-SW/6	Steel	72"	36"
H800S-SW/8	Steel	96"	48"
H800S-SW/10	Steel	120"	60"
H800S-SW/12	Steel	144"	72"

Bottom Channel	94A
Roller Guide	106R/94
Mortise Guides	102N
Side Wall Mortise Guides	102WN (nylon) and 102WA (steel)

800-824-3018 www.pemko.com

H1100A-OH Series

For Sliding Panels up to 1100 lbs. Manufactured by P.C. Henderson $H\underline{\mathrm{END}\underline{\mathrm{E}}\mathrm{RSO}}N$

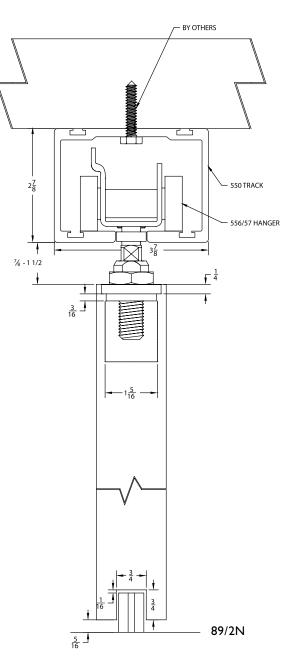

Ideally suited for large doors that require high performance and an attractive finish.

Typical applications are hotels, conference centers, shop-fronts and showrooms.

Configurations: Installations:

- Bi-parting
 Overhead Mount
- Single

Features:

- For top hung wood and metal doors
- Heavy duty black painted steel body
- Ball bearing steel wheels
- 1100 lb. panel capacity
- Mill finished aluminum track 550A

H1100A-OH Kits Include:

- 1 ea **550A** Mill Finished Aluminum Track
- 2 ea **556/57** Painted Black Steel Body Zinc Coated Steel Wheels and Pendant Bolt Hangers
- 2 ea HH3/301 Galvanized Steel In-Track Stops
- 1 ea 89/2N Gray Nylon Mortise Guide

Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H1100A-OH/6	Aluminum	72"	36"
H1100A-OH/8	Aluminum	96"	48"
H1100A-OH/10	Aluminum	120"	60"
H1100A-OH/12	Aluminum	144"	72"
H1100A-OH/16	Aluminum	197"	98"

Bottom Channel	94A
Roller Guide	106R/94
Threshold	971A

🗱 PEMKC

ASSA ABLOY

Ideally suited for large doors that require high performance

and an attractive finish.

Typical applications are hotels, conference centers, shop-fronts and showrooms.

Configurations: Installations:

- Bi-parting
- Single

Features:

• Heavy duty black painted steel body ball bearing wheels

• Side Wall Mount

- 1100 lb. panel capacity
- Mill finished aluminum track 550A

H1100A-SW Kits Include:

- 1 ea **550A** Mill Finished Aluminum Track - **1A/550** Aluminum Alloy Side Wall Track Bracket Fastners not included with IA/550. (One at each end and
- Fastners not included with IA/550. (One at each end and no more than three feet in between) 2 ea 556/57 Painted Black Steel Body - Zinc Coated Steel
- Wheels and Pendant Bolt Hangers
- 2 ea HH3/301 Galvanized Steel In-Track Stops
- 1 ea **89/2N** Gray Nylon Mortise Guide

Standard Kit Sizes			
Part Number	Material	Track Length	Door Width
H1100A-SW/6	Aluminum	72"	36"
H1100A-SW/8	Aluminum	96"	48"
H1100A-SW/10	Aluminum	120"	60"
H1100A-SW/12	Aluminum	144"	72"
H1100A-SW/16	Aluminum	197"	98"


Options: See page SF-25

Bottom Channel	94A
Roller Guide	106R/94

H1100A-SW Series

For Sliding Panels up to 1100 lbs. Manufactured by P.C. Henderson


HENDERSON

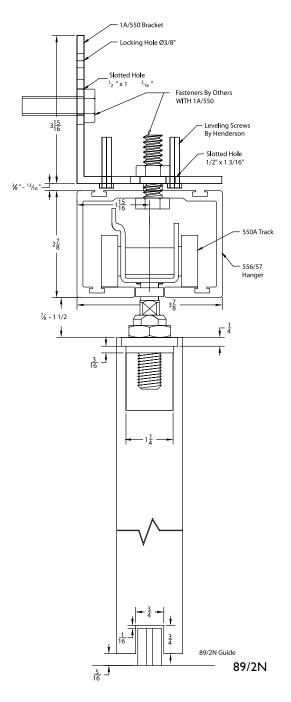



Sliding Glass Series

Manufactured by P.C. Henderson HENDERSON

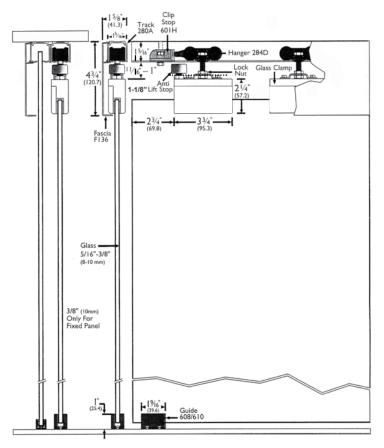

For lightweight glass applications such as office doors and small glass partitions.

Capacity:

Max. door weight	165 lbs. (75kg)
Max. door height	7' 10" (2400mm)
Max. door width	4' 1" (1250mm)
Glass thickness	5/16" (8mm) & 3/8" (10mm)

Door Types:

Glass panels of 5/16" (8mm) or 3/6" (10mm) thickness in tempered or laminated glass.


8/10/75 HUSKY Glass Clamp Kit:

- 284D Hangers 2 ea
- GLASS Clamps w/anti-lift stop 2 ea
- 601H End stops 2 ea
- 1 ea 610 Guide
- 608 Guide 1 ea

NOTE: When using glass clamps in combination with protective coatings for glass surfaces, ensure that the portion of the glass surface to be clamped is not treated.

Options: See page SF-25

Track:	280A (extruded aluminum) Available in 6', 8', 10' & 12' lengths	
Face mount bracket:	281 available as 5 pack only, 2815 NOTE: Need one on each end, with no more than 3 feet in between each bracket. Fasteners included.	
Fascias:	F136 Soffit Fixed Track	
Guides:	608 and 610 glass guides	
Accessories:	601H retaining stop mounted within the track	

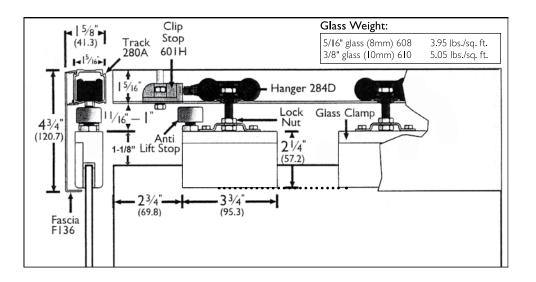

AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart) A (Mill Finish Aluminum) C (Clear Anodized)

SF-20

• Standard kit is for 13/8" door. For 13/4" door, MUST use

• Chrome plated steel hangers are corrosion resistant and

PF134KIT (see Options below)

no maintenance is required

Knock-down construction

🕻 PEMKC

ASSA ABLOY

Pocket Frame Kit

Manufactured by PEMKO

- Heavy duty hardware supports doors up to 175 lbs. each
- Door actuation requires less than 5 lbs of horizontal force, meeting ADA requirements
- Extruded aluminum track
- Solid wood studs encased in extruded aluminum reduces corrosion and minimizes bowing effects
- Pocket Frame Kit Includes: <u>3</u> OVERHEAD STUD 1 ea Header Track Assembly PFAS_ Aluminum Cased Wood Studs 4 ea PF280 PFHB-1 and PFHB-2 Pre-Mounted Header Brackets 2 ea H222-45 2 ea H222-45 Hangers PFFC-8 Floor Cleats 2 ea $2\frac{3}{8}$ **PFBS** Pocket Bumper Stop 1 ea PFBG-8 Pocket Frame Bottom Guide for 1%" Thick Doors 1 ea 2¹/₄″ MAX Mounting Hardware IZ" MIN Leading Edge Studs Adjustable Track Header Bracket Hanger h. LEADING EDGE STUD CENTER STUD <u>5</u> 16 DOOR **Rough Frame** DOOR 13 HEIGHT Opening Dimensions: 2X Door Width +1" and Door Height + 5" Bumper Cleat Stop Center Bottom Guide Studs BOTTOM GUIDE 13 Pre-mounted Header Brackets (2) Floor Cleats (2) **Options:** PF134 KIT - Must be ordered for 13/4" doors Available Kits* PFAS88 - An extra pair of 88" center studs with floor Not Door Size
- cleat for 84" tall doors, for doors over 3' wide
- PFAS100 An extra pair of 100" center studs with floor cleat for 96" tall doors, for doors over 3' wide
- **PFCDKIT** Conversion Kit to achieve a bipart double door frame
- PFKIT-4 - Hardware Kit for PEMKO Pocket Frame Kit for 13/4" thick doors (Each contains 2-H222-45 Hangers, 1-PFBS Bumper Stop, 1- PFBG-4 Guide, 2 PFHS Header Shims, 2-PFFC-4 Floor Cleats)
- PFKIT-8 - Hardware Kit for PEMKO Pocket Frame Kit for 1%" thick doors (Each contains 2-H222-45 Hangers, 1-PFBS Bumper Stop, 1- PFBG-8 Guide, 2-PFFC-8 Floor Cleats)


2 x 4 (3½" Stud)	2 x 6 (51⁄2" Stud)	2 x 6 (6" Stud)	(The Kits can be trimmed in field)
PF28200A6080	PF28200A6080-2x6	PF28200A6080-SP6	2'6" x 6'8"
PF28200A7280	PF28200A7280-2x6	PF28200A7280-SP6	3'0" × 6'8"
PF28200A9680	PF28200A9680-2×6	PF28200A9680-SP6	4'0" × 6'8"
PF28200A6084	PF28200A6084-2x6	PF28200A6084-SP6	2'6" × 7'0"
PF28200A7284	PF28200A7284-2x6	PF28200A7284-SP6	3'0" × 7'0"
PF28200A9684	PF28200A9684-2x6	PF28200A9684-SP6	4'0" × 7'0"
PF28200A6096	PF28200A6096-2x6	PF28200A6096-SP6	2'6" × 8'0"
PF28200A7296	PF28200A7296-2×6	PF28200A7296-SP6	3'0" × 8'0"
PF28200A9696	PF28200A9696-2×6	PF28200A9696-SP6	4'0" × 8'0"

*Custom sizes available call for information


Folding 100 Series


For Folding Doors and Room Dividers up to 100 Lbs. For Doors up to 24" Wide x 96" Tall Manufactured by P.C. Henderson

HENDERSON

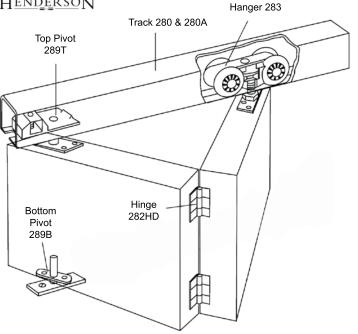


NOTE: Allow ¼" clearance at pivot jambs and 1/8" in between hinged doors if hinges are semi mortised. Allow 3/16" between hinged doors if hinges are surface mounted. Allow 1/8" between doors meeting in the center of the opening on HF4 kits and allow 1/8" between wall and end panel on HF2 kits.





280A Overhead Mounted



High quality hardware makes medium weight folding doors efficient and easy to use. Two and four leaf kits are available.

Two Panel:

HF2/100A Kits Include:

- 1 ea 280A Mill Finished Aluminum Track
- 283 Hanger 1 ea
- 1 ea 289T Top Pivot
- 289B Bottom Pivot 1 ea
- 3 ea 282HD Hinges
- 1 ea 106HF/94 Roller Guide
- 1 ea 94A Aluminum Guide Channel
- Adjusting Wrench and Mounting Hardware 1 ea

Four Panel:

HF4/100A Kits Include:

- 1 ea **280A** Mill Finished Aluminum Track
- 2 ea 283 Hangers
- 289T Top Pivots 2 ea
- 2 ea 289B Bottom Pivots
- 282HD Hinges 6 ea
- 2 ea 106HF/94 Roller Guide
- 94A Aluminum Guide Channel 1 ea
- Adjusting Wrench and Mounting Hardware 1 ea

STANDARD KIT SIZES			
Part Number	Material	# of Panels	Track Length
HF2/100A/2	Aluminum	2	24"
HF2/100A/2'6	Aluminum	2	30"
HF2/100A/3	Aluminum	2	36"
HF2/100A/4	Aluminum	2	48"
HF4/100A/4	Aluminum	4	48"
HF4/100A/5	Aluminum	4	60"
HF4/100A/6	Aluminum	4	72"
HF4/100A/8	Aluminum	4	96"
HF2/100/4*	Steel	2	48"
HF4/100/8*	Steel	4	96"

*Steel kits include the same components as above, except track is 1ea 280 galvanized steel.

Options: See page SF-25

Mounting Bracket	281 available as 5 pack only, 2815
Threshold	971A

SF-22


🍪 PEMKO


ASSA ABLOY

Pacer Interior End Fold Series

For Folding Doors and Room Dividers up to 165 lbs. For Doors up to 36" Wide x 106" Tall Manufactured by P.C. Henderson

HENDERSON

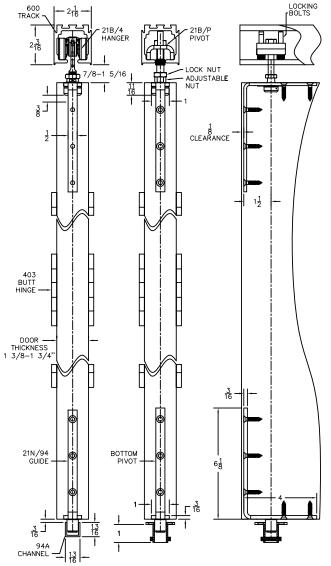

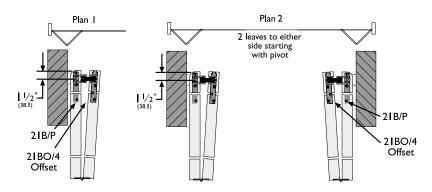

For top-hung, medium weight, interior, partition doors.

Ideal in both residential and commercial applications requiring end folding doors.

Two Panel: plan 1

PIF2/165A Kits Include:

- 1 ea 600A Mill Finished Aluminum Track
- a 21B/P Top and Bottom Pivot Assembly
 a 21BO/4 Nylon Body and Wheels, Zinc Coated Steel Pendant Bolt and Door Bracket Hanger
- 1 ea **21N/94** Nylon Roller Guide on Zinc Coated Steel Door Bracket Bottom Guide
- 4 ea 403/2 Aluminum Alloy Butt Hinges
- 1 ea 94A Aluminum Guide Channel

Four Panel: plan 2

PIF4/165A Kits Include:

- 1 ea **600A** Mill Finished Aluminum Track
- 2 ea 21B/P Top and Bottom Pivot Assembly
- 2 ea **21BO/4** Nylon Body and Wheels, Zinc coated steel Pendant Bolt and Door Bracket Hanger
- 2 ea **21N/94** Nylon Roller Guide on Zinc Coated Steel Door Bracket Bottom Guide
- 8 ea **403/2** Aluminum Alloy Butt Hinges
- 1 ea 94A Aluminum Guide Channel

Standard Kit Sizes			
Part Number	Material	# of Panels	Track Length
PIF2/165A/6	Aluminum	2	72"
PIF4/165A/6	Aluminum	4	72"
PIF4/165A/8	Aluminum	4	96"
PIF4/165A/12	Aluminum	4	2 @ 72"

Options: See page SF-25

Threshold 971A


Note: Allow **%**" clearance at pivot jambs and **%**" in between hinged doors if hinges are semi mortised. Allow **%**" between hinged doors if hinges are surface mounted. Allow **%**" between doors meeting in the center of the opening on PIF4 kits and allow **%**" between wall and end panel on PIF2 kits.

SLIDING AND FOLDING HARDWARE

800-824-3018 www.pemko.com

Flexirol Interior End Fold Series

For Folding Doors and Room Dividers up to 275 lbs. For Doors up to 48" Wide x 177" Tall Manufactured by P.C. Henderson $H\underline{END}\underline{ERSON}$

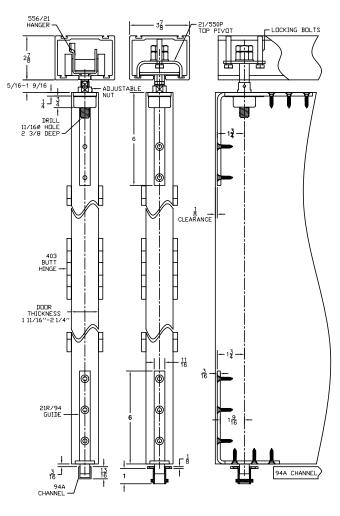

For top-hung, heavy weight, interior, partition doors.

Specifically designed for commercial applications requiring end folding doors.

Two Panel: plan 1

FIF2/275A Kits Include:

- 1 ea **550A** Mill Finished Aluminum Track
- 1 ea 21/550/P Top and Bottom Pivot Assembly
- 1 ea **556/21** Zinc Coated Steel Wheels, Pendant Bolt, Body, and Door Bracket
- 1 ea 21R/94 Bottom Guide
- 4 ea 403/2 Aluminum Alloy Butt Hinges
- 1 ea **94A** Aluminum Guide Channel

Four Panel: plan 2


FIF4/275A Kits Include:


- 1 ea 550A Mill Finished Aluminum Track
- 2 ea 21/550/P Top and Bottom Pivot Assembly
- 2 ea **556/21** Zinc Coated Steel Wheels, Pendant Bolt, Body, and Door Bracket
- 2 ea 21R/94 Bottom Guide
- 8 ea 403/2 Aluminum Alloy Butt Hinges
- 1 ea **94A** Aluminum Guide Channel

Standard Kit Sizes			
Part Number	Material	# of Panels	Track Length
FIF2/275A/6	Aluminum	2	72"
FIF2/275A/8	Aluminum	2	96"
FIF4/275A/6	Aluminum	4	72"
FIF4/275A/8	Aluminum	4	96"
FIF4/275A/12	Aluminum	4	2 @ 72"
FIF4/275A/16	Aluminum	4	2 @ 96"

Options: See page SF-25 Threshold **971A**

Note: Allow $\frac{1}{2}$ " clearance at pivot jambs and $\frac{1}{6}$ " in between hinged doors if hinges are semi mortised. Allow $\frac{3}{6}$ " between hinged doors if hinges are surface mounted. Allow $\frac{3}{6}$ " between doors meeting in the center of the opening on FIF4 kits and allow $\frac{3}{6}$ " between wall and end panel on FIF2 kits.





SSA ABLOY

Options & Accessories





 $\label{eq:copyright} \textcircled{0} 2012, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.$

971A