

HUSKY 100KG SOFT STOP

MAXIMUM DOOR WEIGHT 100kg

FOR SLIDING TIMBER & METAL DOORS

APPLICATIONS

- ▶ Enhancing the sophistication and convenience of the Husky system even further, it gently decelerates sliding doors and pulls them into their final position.
- ▶ It can be used on both the opening and closing side and is suitable for wood and metal sliding doors.
- ▶ The soft stop damper catches the door and draws it into the open or closed position for the last 130mm of travel.
- ▶ Single kit – Soft Stop on one end only (can be installed on either the open or closed side)
- ▶ Double kit – Soft Stop on both ends (operation on both open and closed side), two kits are required.
- ▶ Convenient and installer-friendly - there is no special tooling required.
- ▶ A high-quality, hydraulic damper is at the key of the system, which has been tested to BS EN1527, and will work maintenance-free throughout its lifetime.
- ▶ The Husky Soft Stop has been designed to be installed in new installations or retro-fitted to a current Husky application.

DOOR SPECIFICATION

Maximum leaf weight	100kg
Door thickness	20-50mm
Door width	Single damper installation - Minimum door width 716mm Double damper installation – Minimum door width 1078mm (Double damper not available on Pocket Door)
Door material	Suitable for use with timber framed doors of flush, panelled or glazed construction. Metal doors should be lightly constructed of channel or angle framing, clad with sheeting as required.

GEAR SPECIFICATION

Kit Soft100: Husky 100kg soft stop kit


- one damper
- one soft stop block
- one soft stop hook
- one soft stop hook block
- fitting instructions
- all fixings required for the kit

The kit is universal either for closed or open positions, so for double applications for open and close damping order two kits

Required extras 2 nylon-bodied needle roller-bearing 4-wheel hangers (284)

- Track, in either:
- Steel (280)
 - Aluminium mill finish (281A); or
 - Aluminium anodised finish (280AN)


Optional extras See Husky 100 data sheet for full optional extra information, or alternatively contact PC Henderson on the contact information overleaf.

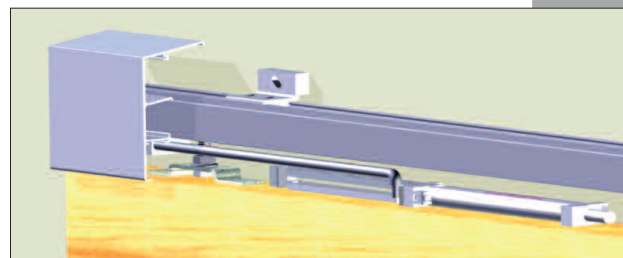

HUSKY 100KG SOFT STOP

PLEASE NOTE:

Single damper installation; Minimum door width = 716mm
 Double damper installation; Minimum door width = 1078mm
 Double damper not available on pocket door

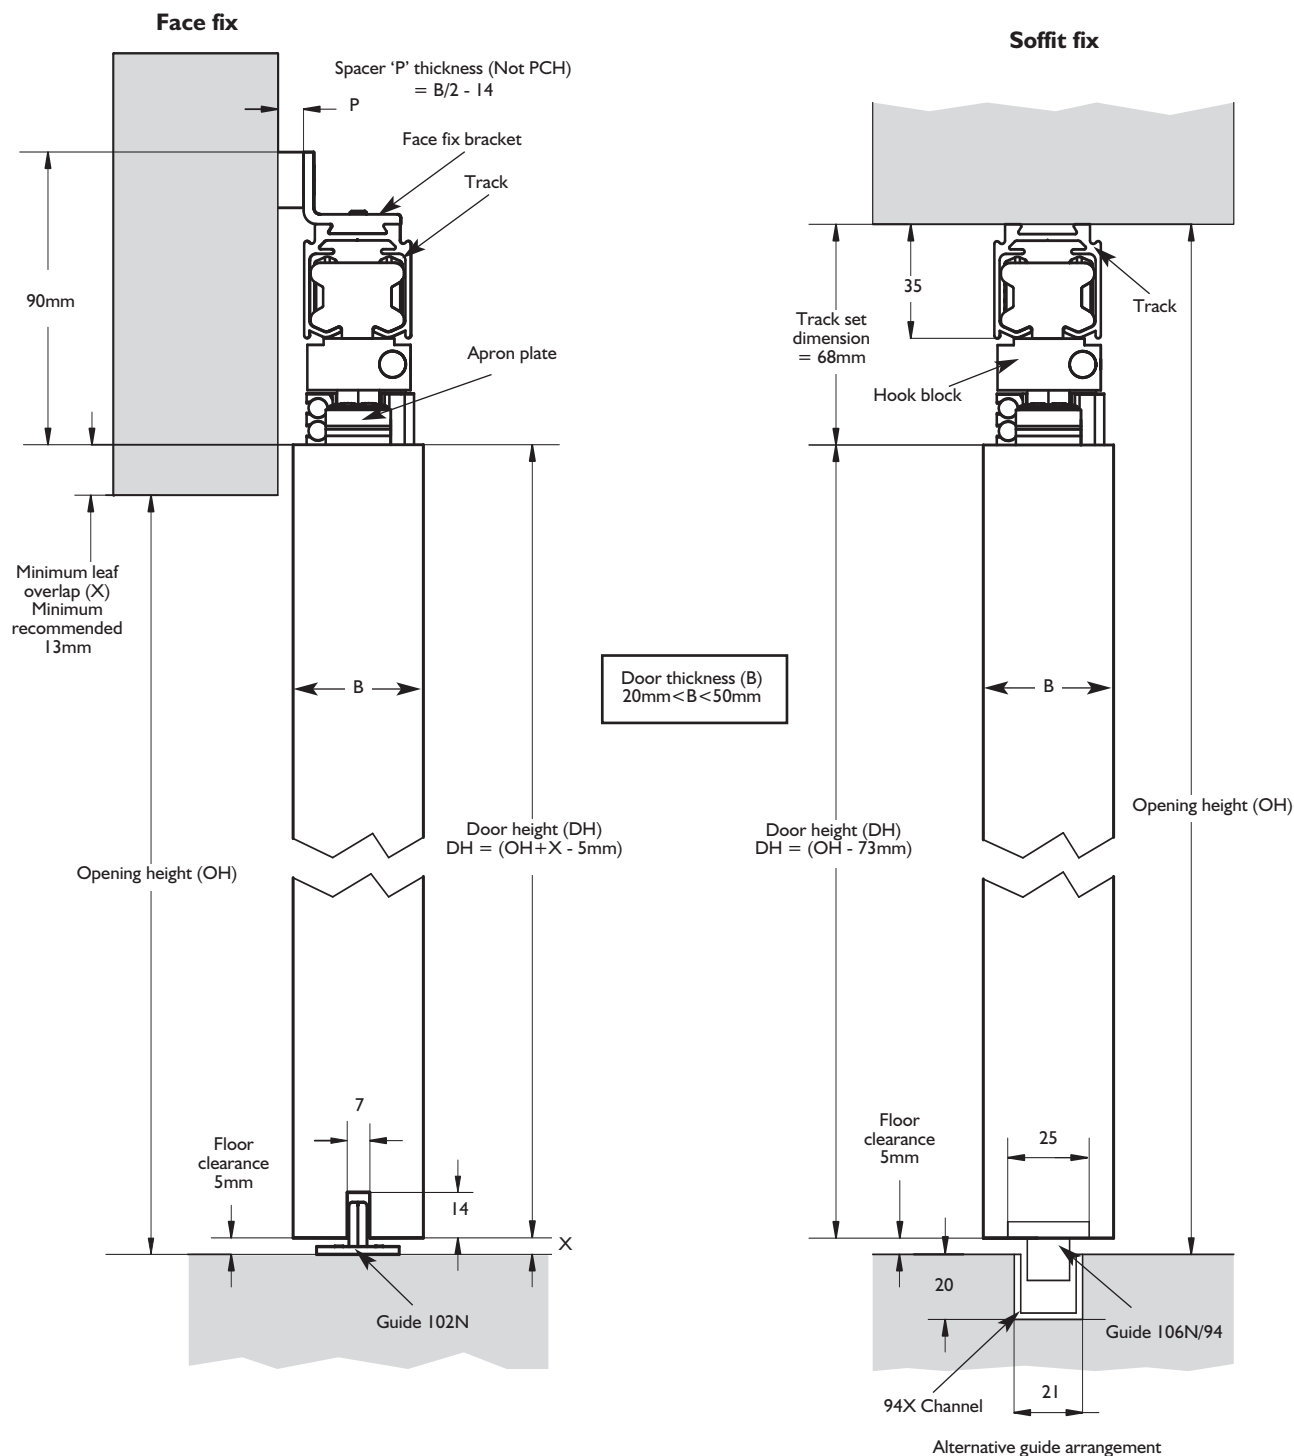

(All dimensions in mm)

HENDERSON

P C Henderson Limited, Durham Road, Bowburn, County Durham DH6 5NG, UK. Web: www.pchenderson.com
 UK Customer Services Department: Tel: +44 (0)191 377 7345 Fax: +44 (0)191 377 3116 Email: sales@pchenderson.com
 Export Department: Tel: +44 (0)191 377 7346 Fax: +44 (0)191 377 0755 Email: international@pchenderson.com
 For all technical queries email our Technical Department: technical@pchenderson.com