


PACER STRAIGHT SLIDING FOR TOP-HUNG TIMBER AND METAL DOORS

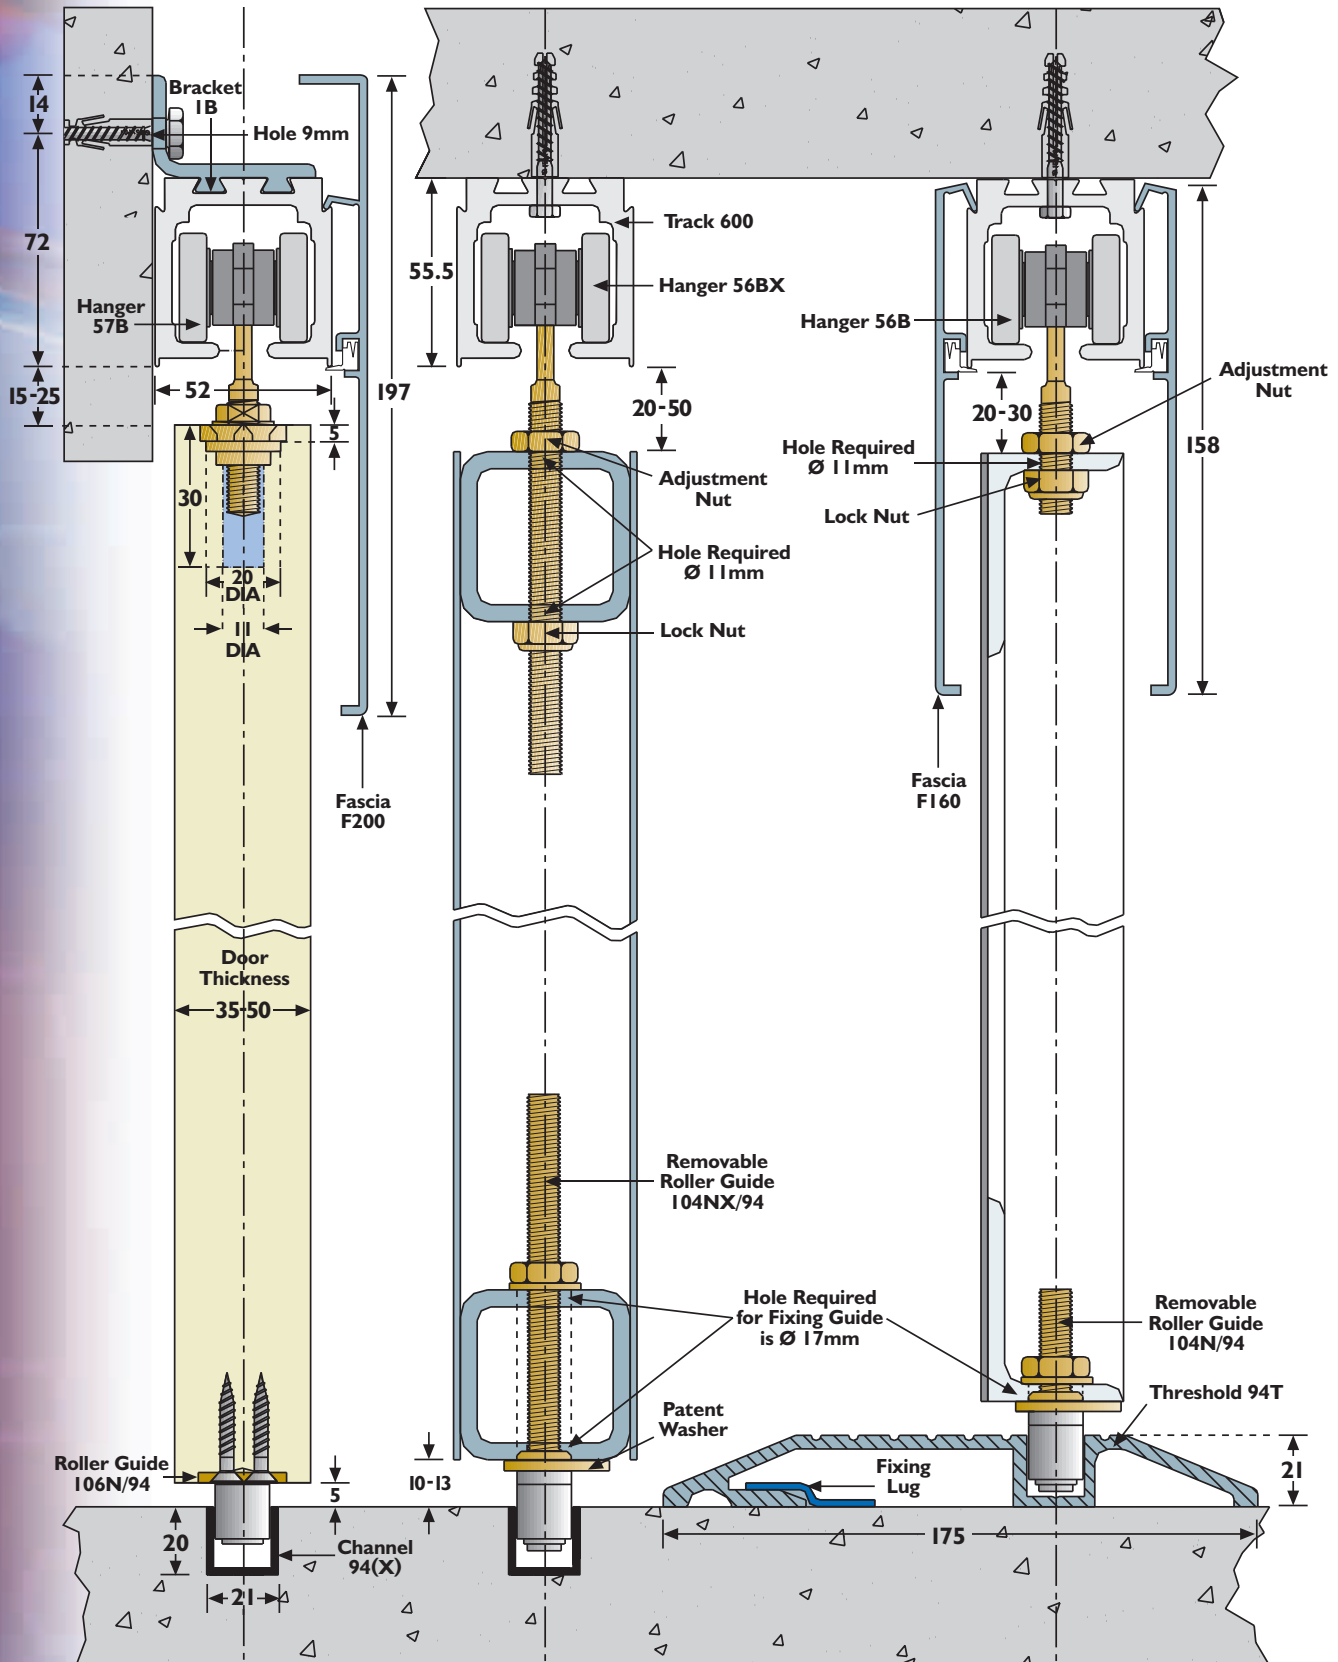

CAPACITY


Max. door weight: 200kg
 Max. door height: 3000mm
 Door thickness: 35mm-50mm

APPLICATIONS

Combining performance and style with versatility, Pacer straight sliding in timber, glass, aluminium or metal is ideally suited to the modern arena of shop-fronts, offices and other stylish interiors.

DOOR TYPES

Timber doors for interior applications can be either solid or glazed. Metal doors can be of angle or box section. Aluminium is dependent on extrusion profile.

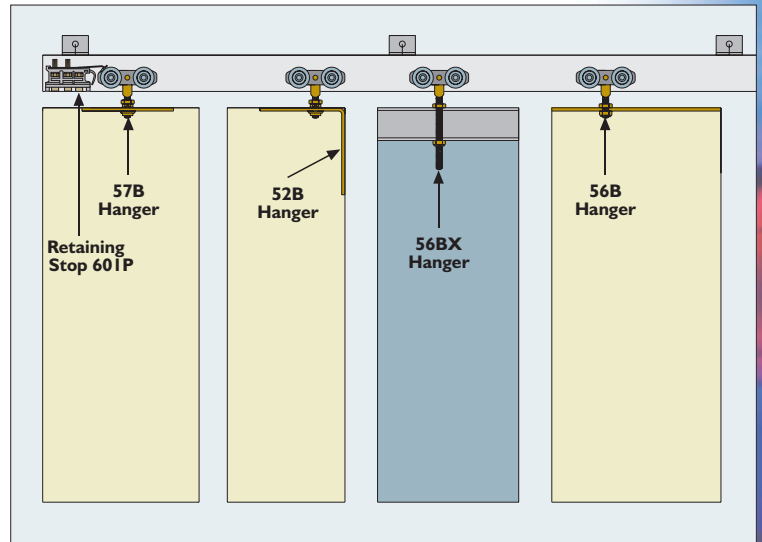

TECHNICAL INFORMATION

Track:	Aluminium	600
	Available in 2000mm, 2500mm, 3000mm, 3500mm, 4000mm and 6000mm lengths	
Brackets:	Face fix	IB
	Jointing bracket	IBX
Fascias:	Soffit fixed track	F160 with standard return
	Face fixed track	F200 with standard return
	Fascia comes in a satin anodised aluminium finish in lengths of 2000mm, 2500mm, 3000mm, 3500mm, 4000mm and 6100mm	
Hangers:	Wood doors	57B - concealed fixing
	Wood doors	52B - angle plate fixing
	Aluminium/Metal doors	57B - concealed fixing
	Metal doors	56B - angle frame
	Metal doors	56BX - box frame
Guides:	Wood/Aluminium/Metal doors	89/2N - floor mounted guide
	Wood/Aluminium doors	106N/94 - concealed fixing
	Metal doors	104N/94 - angle frame
	Metal doors	104NX/94 - box frame
Guide Channel:	Brass	94
	Aluminium	94X
	Aluminium threshold/guide channel	94T
	94 channel available in 1500mm and 3000mm lengths.	
	94X channel available in 1500mm, 2000mm, 2500mm, 3000mm lengths.	
	Aluminium threshold available in 2000mm, 2500mm, 3000mm, 3500mm, 4000mm and 6000mm lengths.	
Accessories:	Retaining stop mounted within the track 60IP	
	Track Stop HH3/290	

