


Bolt lengths







450kg (990lb) force Max wind load Min door thickness 44.45mm (1-3/4")

200/400/600/1000mm

SYMPHONY


The flush-mounted flushbolts, rounded style and 1" (25mm) throw are designed for use with sliding and folding doors. Symphony™ will resist high winds and is rated to resist a 250kg load in Western Red Cedar and 450kg in Amoora

The bolts are easily installed with a dedicated router bit and are available in three finishes. (8"/16"/24"/39")

25mm (1") Throw length

Finishes Bright Gold Aluminum to match PVD Brass Hardware, P.C. Bronze on Aluminum to match Bronze Hardware.

Brushed Aluminum to match Stainless Steel Hardware

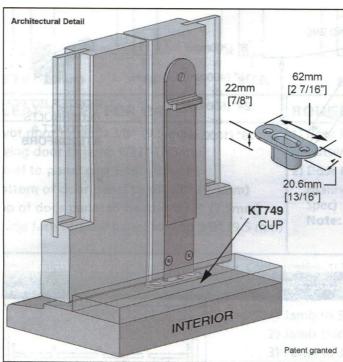


Machining For Flushbolts (Face Plate) 8" (200mm)


1-13/32" x 7-13/16" (36mm x 198mm) 16" (400mm)

1-13/32" x 15-11/16" (36mm x 398mm)

1-13/32" x 23-1/2" (36mm x 597mm)

1-13/32" x 39-3/8" (36mm x 999mm)

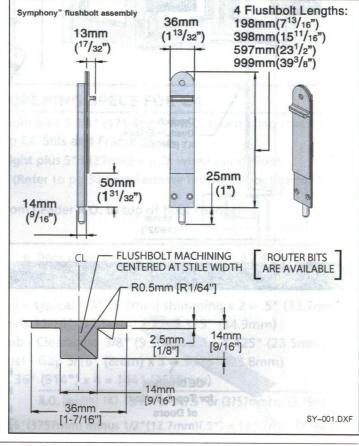





24" (600mm)

39" (1000mm)

Dedicated router bits are available for flushbolts.

| Select Finish | Part Number | Description / Pc |
|---|---|--|
| Bright Gold Aluminum | KTDBSY200NRG KTDBSY400NRG KTDBSY600NRG | Symphony 8" (200mm) / 1" Throw, Round End Symphony 16" (400mm) / 1" Throw, Round End Symphony 24" (600mm) / 1" Throw, Round End |
| Powder Coat Bronze over Aluminum | KTDBSY200NRQ KTDBSY400NRQ KTDBSY600NRQ KTDBSY1000NRQ | Symphony 8" (200mm) / 1" Throw, Round End Symphony 16" (400mm) / 1" Throw, Round End Symphony 24" (600mm) / 1" Throw, Round End Symphony 39" (1000mm) / 1" Throw, Round End |
| Brushed Aluminum to Match Stainless Steel | KTDBSY200NRX KTDBSY400NRX KTDBSY600NRX KTDBSY1000NRX | Symphony 8" (200mm) / 1" Throw, Round End Symphony 16" (400mm) / 1" Throw, Round End Symphony 24" (600mm) / 1" Throw, Round End Symphony 39" (1000mm) / 1" Throw, Round End |