




FLEXIROL EXTERIOR ENDFOLD FOR TIMBER DOORS

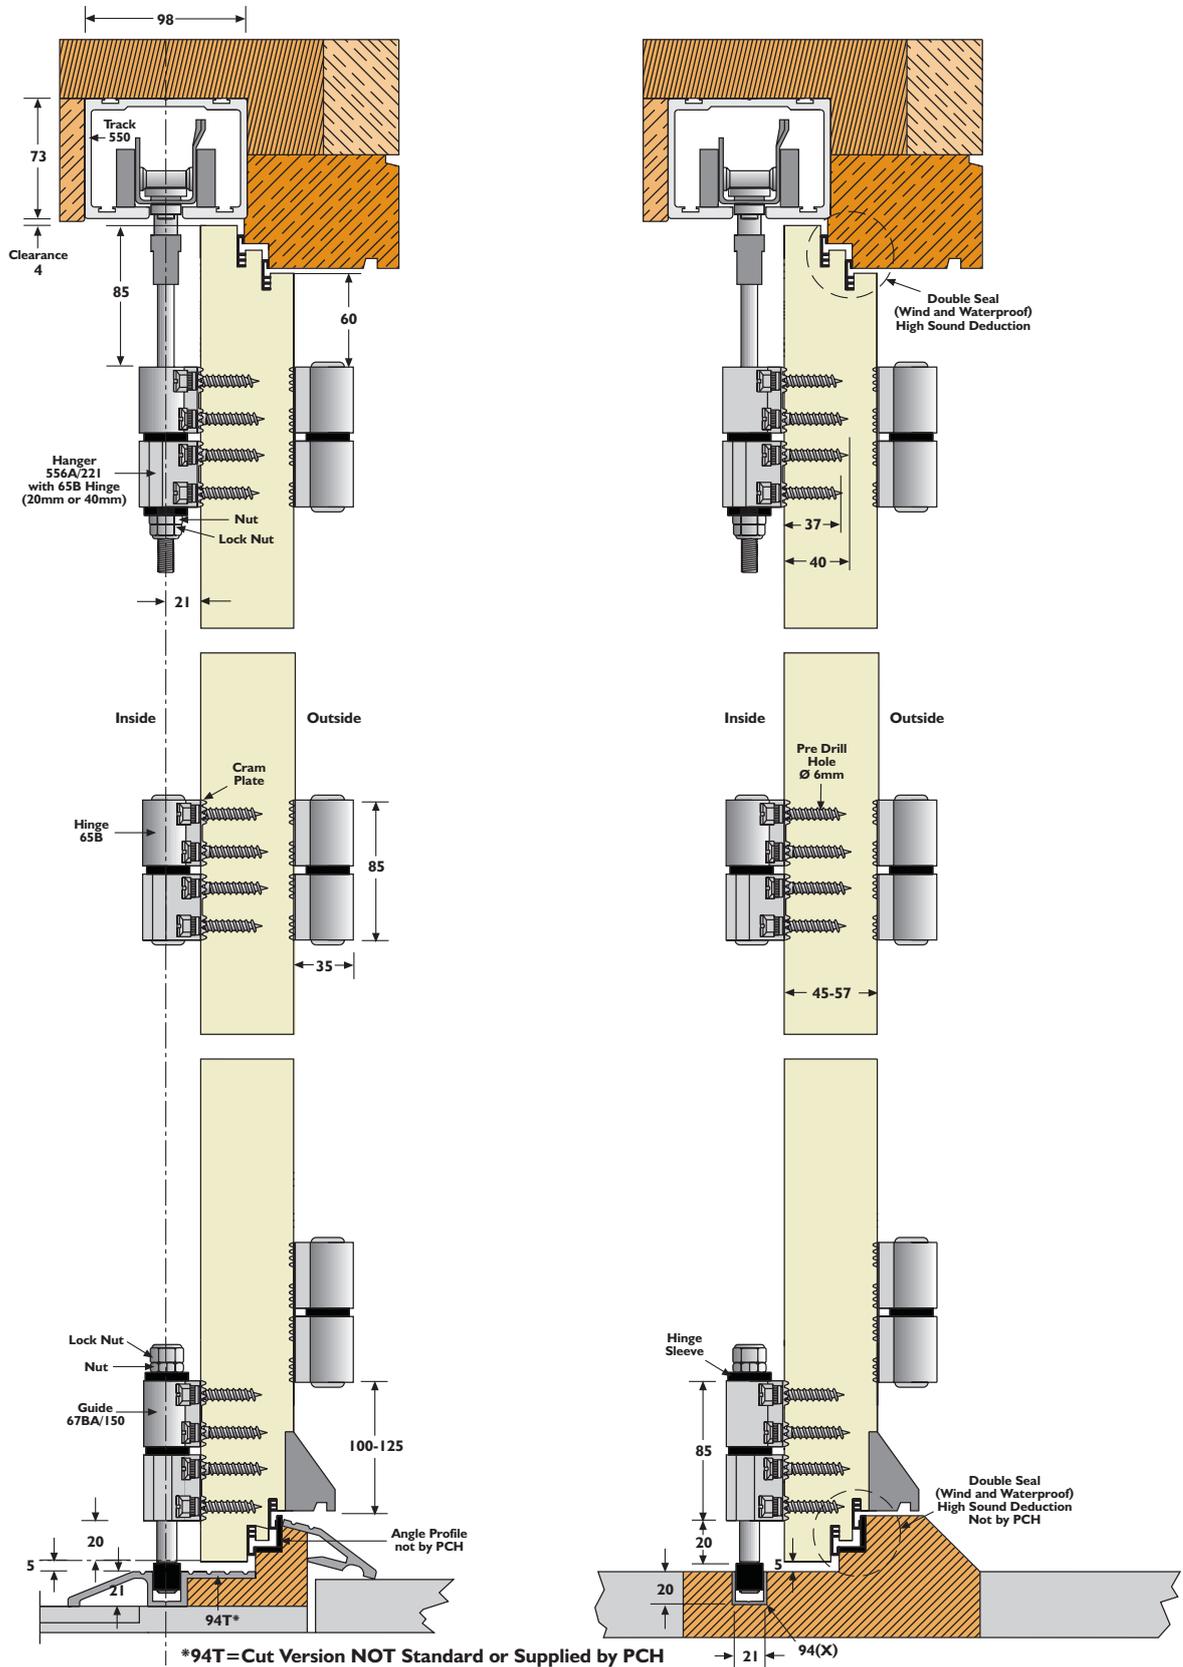

*94T=Cut Version NOT Standard or Supplied by PCH

CAPACITY

Max. door weight: 125kg
 Max. door height: 4500mm
 Max. door width: 1200mm
 Door thickness: 45mm-57mm

APPLICATIONS

Top-hung Flexirol gear and fittings for heavy end folding timber doors. Leaves can be hung to the left or right of an opening.

DOOR TYPES





Heavy commercial timber doors.

TECHNICAL INFORMATION

Track:	Aluminium	
Brackets:	Face fix (fixed at 500mm intervals) Joining track	
Hangers:	Intermediate or end hanger for timber/ aluminium doors with 221mm strapbolt, no hinge	1A/550 3S/550
Guides:	Intermediate guide for timber doors with 150mm spindle, no hinge End guide for timber doors with 110mm spindle, no hinge	556A/221 67BA/150 68BA/110
Guide Channel:	Brass Aluminium Aluminium threshold/guide channel	94 94X 94T
Hinges:†	20mm single hinge for timber doors 20mm double hinge for timber doors 40mm single hinge for timber doors 40mm double hinge for timber doors 20-40mm double hinge for timber doors	65B/20/1 65B/20 65B/40/1 65B/40 65B/20-40
Accessories:	Flush pull Flush bolts Narrow flush bolt and keep Aluminium door mounting kit	400 333/454 F3715 & F3734 60B

* All with stainless steel strapbolt/spindle.

† Refer to page 58 for hinge installation.

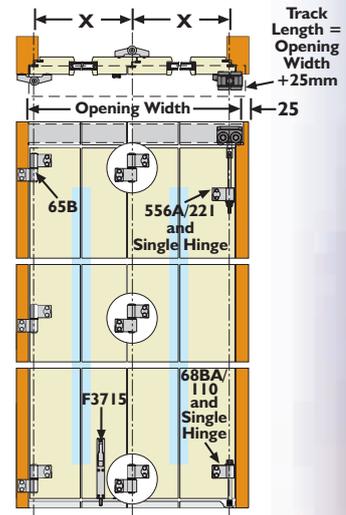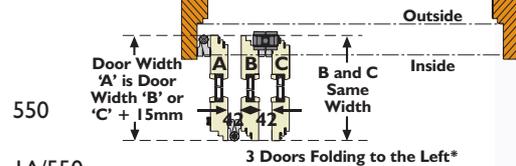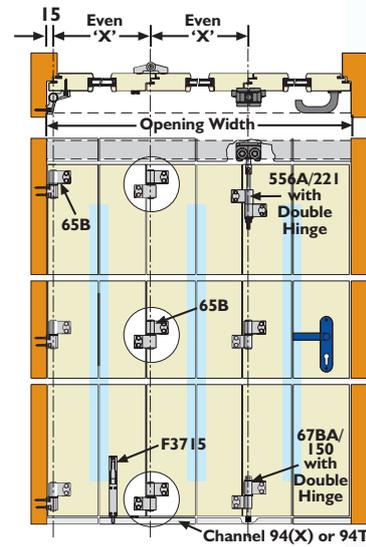

*For other options see Hinge Installation page 58.



Hinges for hangers and guides must be ordered separately. Use a single hinge for end hangers and guides, double hinge for intermediate hangers and guides.