




# PACER INTERIOR CENTREFOLD FOR TIMBER DOORS

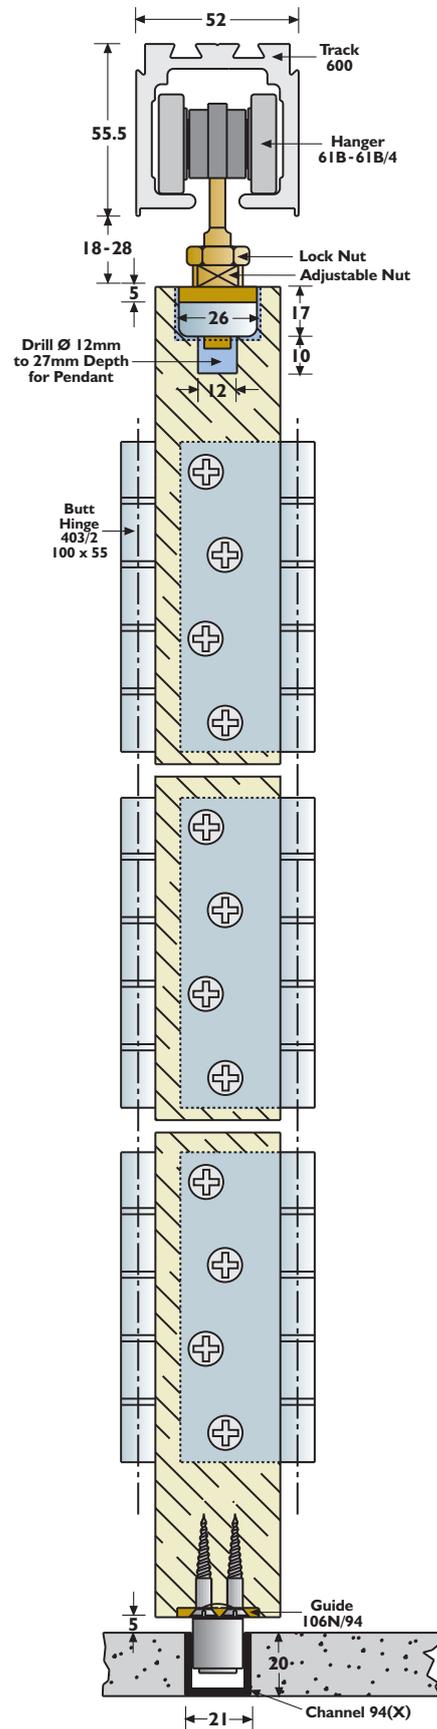

## CAPACITY

Max. door weight: 35kg (61B hanger)  
75kg (61B/4 hanger)

Max. door height: 2700mm

Max. door width: 900mm

Door thickness: 35mm-44mm

## APPLICATIONS


Top-hung Pacer gear and fittings for centre folding timber partition doors. Leaves are hung centrally and can fold to one or both sides. For applications hinged to the jamb, 3 1/2, 5 1/2 or 7 1/2 leaves can be used with the half-leaf hinged to the jamb. For best operation of floating units, 5, 7 or 9 leaves should be used. Any access door should be hinged separately to the jamb.

## DOOR TYPES

Residential and commercial timber doors.

## TECHNICAL INFORMATION

Track:	Aluminium Available in 2000mm, 2500mm, 3000mm, 3500mm, 4000mm and 6000mm lengths	600
Brackets:	Face fix (fixed at 500mm intervals) Joining bracket	1B 1BX
Hangers:	Two-wheeled hanger Four-wheeled hanger	61B 61B/4
Guides:	Nylon guide roller	106N/94
Guide Channel:	Brass Aluminium Aluminium threshold/guide channel 94 channel available in 1500mm and 3000mm lengths. 94X channel available in 1500mm, 2000mm, 2500mm, 3000mm lengths. Aluminium threshold available in 2000mm, 2500mm, 3000mm, 3500mm, 4000mm and 6000mm lengths.	94 94X 94T
Hinges:	Butt hinges - 100x55	403/2
Accessories:	Flush pull Flush bolts Narrow flush bolt and keep	400 333/454 F3715 & F3734

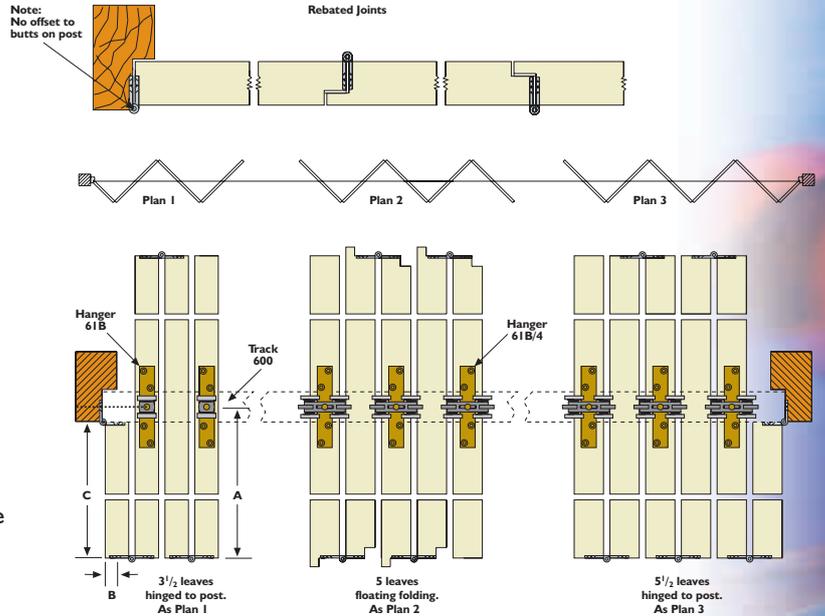

All full leaves are of equal width.  
A pivoting half-leaf (dimension C) is half the width of a full leaf (dimension A), less half of the leaf thickness (dimension B).

