


HUSKY GLASS



Fixed Panel Option

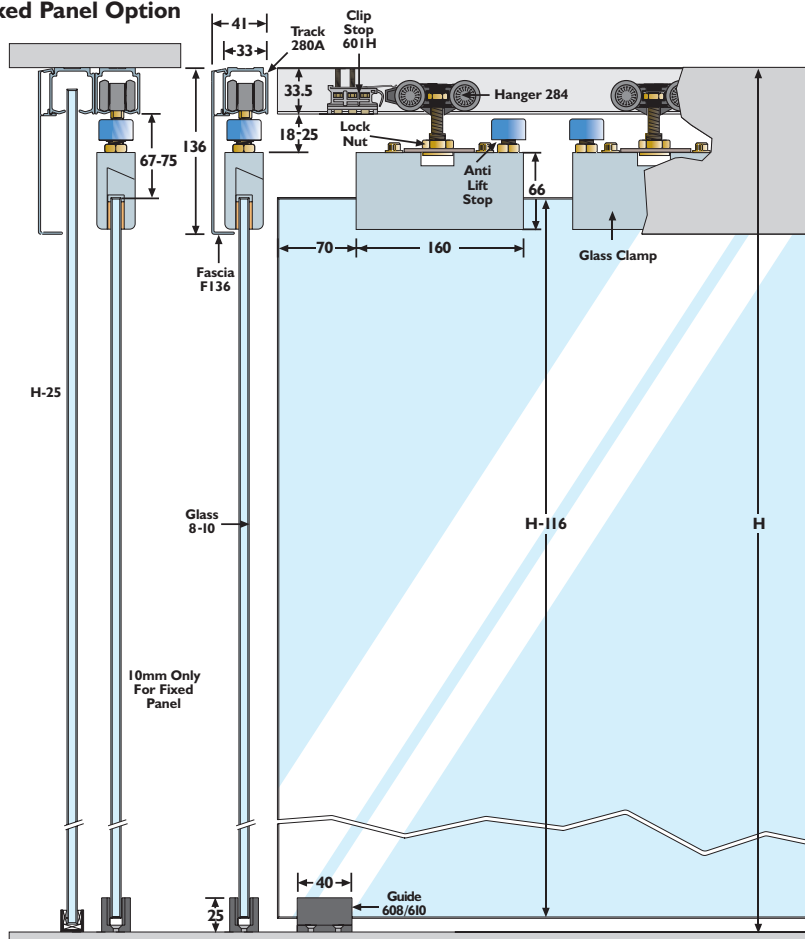

CAPACITY

- Max. door weight: 75kg
- Max. door height: 2400mm
- Max. door width: 1250mm
- Glass thickness: 8mm and 10mm

APPLICATIONS

Husky offers a solution to lightweight glass applications such as office doors and small glass partitions.

DOOR TYPES

Glass panels of 8mm or 10mm thickness in BS6206 toughened glass.

Note: when using glass clamps in combination with protective coatings for glass surfaces such as Clear Shield, ensure that the glass surface to be clamped is not treated with the Clear Shield coating.

TECHNICAL INFORMATION

Track:	280A (extruded aluminium) Available in 1500mm, 2000mm, 2500mm, 3000mm lengths	
Brackets:	Face fix	281
Fascias:	Soffit fixed track	F136
Glass clamp kit:	8mm or 10mm glass panels	8/10/H100 - hanger and glass clamp
	Kit consist of two 284 hangers, two glass clamps, two 601H retaining stops, and an 8mm and 10mm guide	
Guides:	8mm glass panels 10mm glass panels	608 - glass guide 610 - glass guide
Accessories:	601H retaining stop mounted within the track	

