

## MARATHON FIRE DOOR KIT

### STANDARD KIT SIZES

The MARATHON Fire Door Kit (FDK 1) is produced in one standard size for use with doors weighing up to 90kg max. and must be used with a MARATHON Kit 'S3' for doors 750 - 900mm wide or set 'S4' for doors 900 - 1050mm wide or set 'S5' for doors 1050mm - 1200mm wide or set 'S6' for doors 1200mm - 1500mm wide. (S3/S4/S5/S6 not included in Fire Door Kit).

### OPERATION

The easily operated sliding door is returned automatically to the closed position after each operation by the smooth operation of the counterbalance weights.

### INTUMESCENT SEAL

It is required that intumescent fire seals be incorporated into the door opening framework to contain the fire within the fire area (do not use smoke seals as this will hinder self closing action - seals not supplied by P C Henderson Limited).

### FIRE RATING

The Marathon Fire Door Kit (FDK1) is a system developed as part of a half hour sliding fire door assembly to BS 476: Part 22: 1987, and should be installed on the non-fire risk side of an aperture.

The assembly must be fitted with a solid core FD30, or FD60, timber based fire door positively appraised by Warrington Fire Research or CERTIFIRE approved. Assessment report WFRC No.173148 confirms that a sliding fire door assembly, fitted in accordance with these instructions, will offer 30 minutes of fire protection in accordance with BS 476: Part 22: 1987, (ref: report Warres No. 40991).

For further assistance please contact the Technical Sales Team at [technical@pchenderson.com](mailto:technical@pchenderson.com)


**HENDERSON**

P C Henderson Limited, Durham Road, Bowburn, County Durham DH6 5NG, UK. Web: [www.pchenderson.com](http://www.pchenderson.com)  
 Customer Services Department: Tel: +44 (0)191 377 7345 Fax: +44 (0)191 377 3116 Email: [sales@pchenderson.com](mailto:sales@pchenderson.com)  
 Export Department: Tel: +44 (0)191 377 7346 Fax: +44 (0)191 377 0755 Email: [international@pchenderson.com](mailto:international@pchenderson.com)

## MARATHON FIRE DOOR KIT

### FOR FIRE DOORS UP TO 90kg

Designed for use solely in conjunction with the P C Henderson Marathon S3,S4,S5 or S6 gear sets

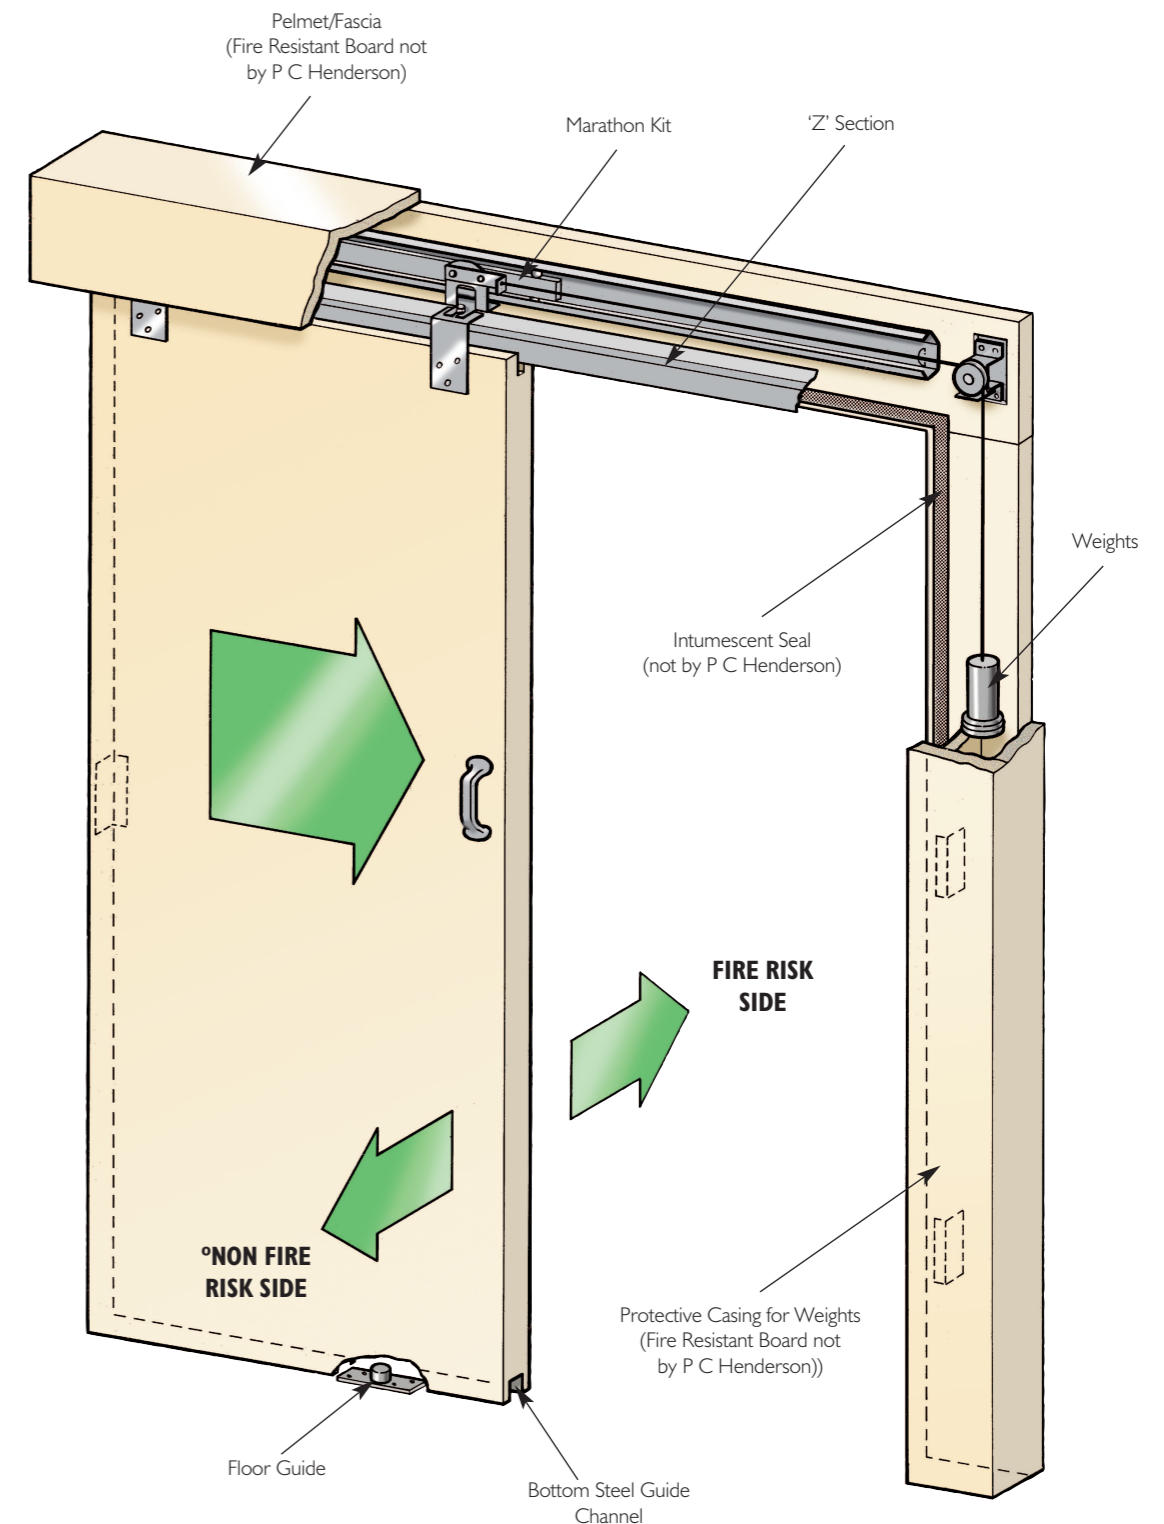

### WARNING:

Doors must be free to close at all times. Do not retain in open position. Be aware of the area the door moves through during its operation cycle. Keep people and objects out of the way at all times.

Part No:300810 - June 2010

HENDERSON

# MARATHON FIRE DOOR KIT - Typical Assembly

Kit	Door Width, A	Door Thickness, B	Hanger Centres, E	Max. Weight
S3	750 - 900	32 - 50	368	90kg
S4	900 - 1050	32 - 50	445	90kg
S5	1050 - 1200	32 - 50	546	90kg
S6	1200 - 1500	32 - 50	724	90kg

ITEM No.	DESCRIPTION	QTY
1	Cable anchor plate	1
2	Pulley assembly	1
3	Adjustment stem & cable sub assembly	1
4	'Z' Section	1
5	Main weights	5
6	Make weights	8
7	M5 x 12 Cheese head set screw	2
8	Clamp cleat	1
9	Apron assembly	2
10	Door binder 'front edge'	2
11	Binder 'receiving plate'	1
12	Door binder 'back edge'	1
13	Guide 106/93	1

