

Easily installed, no-maintenance design for exceptionally quiet sliding doors, with optional kits for conversion to simultaneous action or self-closing doors.

### KITS

Standard kits for a single leaf door contain: jump-proof track for face/soffit fixing; twin nylon-wheeled, low friction adjustable one piece hanger and fixing plates; adjustable nylon guide; stop and fixing instructions.

### OPTIONAL EXTRAS


Optional extras include: self-closing system pulley assembly (advise leaf weight); simultaneous action unit (2 leaf doors) no. 23; anti-draught doorseal no. DS1; pelmet no. 40P and pelmet end caps (2 off) no. EC40P; flushpull no. 400; flush-bolt no. 333; lock no. 295; door edge sponge strip no. 537 (see pp 52-57 for full product description). Bulk component packs are also available.

### INSTALLATION NOTES

(also see drawing)


For a wood door to maximum 45kg weight per leaf, width 610 min - 915mm max and door thickness 30-50mm. Door construction must permit secure fixing of hanger plates.

For single door width	Kit no.
610 - 915mm	P9
<b>Max leaf size</b>	<b>2400 x 915 x 50mm (min width 610mm)</b>
<b>Max leaf weight</b>	<b>45kg</b>

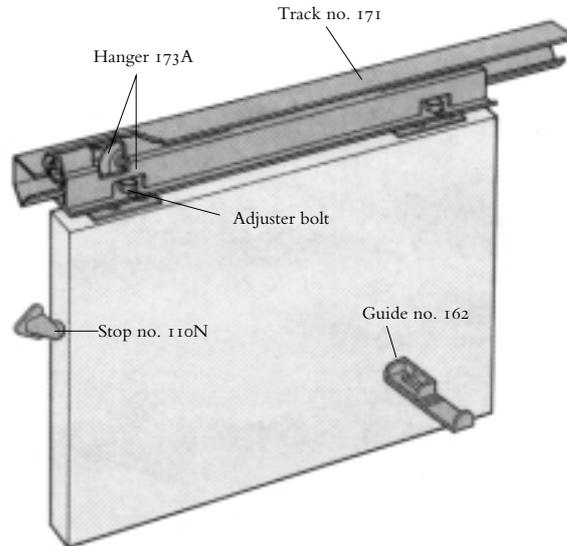

#### FACE FIXED

#### SOFFIT FIXED

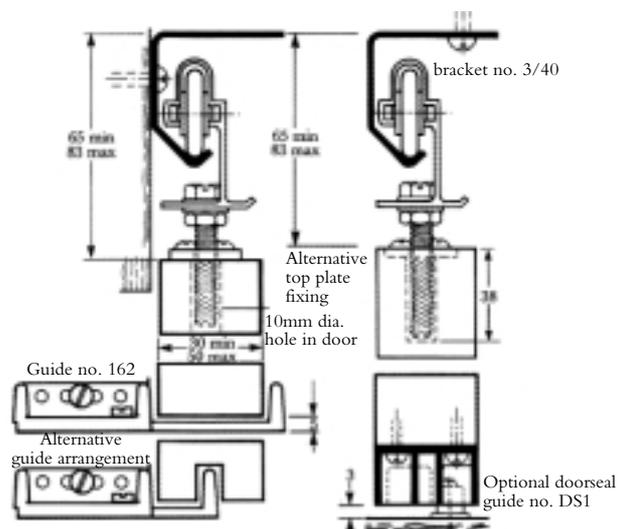

All dimensions in mm