

THE POCKET DOOR KIT

MAXIMUM DOOR WEIGHT 60kg

APPLICATION

- ▶ Residential interior doors that need to slide into a wall cavity.
- ▶ Ideally suited to applications where space is at a premium such as toilets, bathrooms and kitchens.

DOOR SPECIFICATION

For individual doors:

| | |
|---------------------|--|
| Maximum door weight | - 60kg |
| Door thickness | - 28-44mm |
| Door sizes | - PDK3 up to 1981mm high x 762mm wide |
| | - PDK4 up to 1981mm high x 838mm wide |
| | - PDK5 up to 2040mm high x 762mm wide |
| | - PDK6 up to 2040mm high x 826mm wide |
| | - PDK7 up to 2040mm high x 726mm wide |
| | - PDK10 up to 2315mm high x 930mm wide |

All sets come complete with pre-assembled aluminium track and header assembly.


The Pocket Door uses the Husky sliding door gear system with aluminium track and fully adjustable floor guide.

Overall wall thickness with 12.5mm wall boards is 115mm.

GEAR SPECIFICATION

| | |
|------------------|--|
| Dimensions: | Kits can be cut down to suit smaller door sizes |
| Track: | 280A |
| Hanger Set: | Husky 100 |
| Framework: | Galvanised steel wrapped softwood studs (x4) Galvanised steel stud spacing brackets (x2) Galvanised steel stud support brackets (x2) Softwood header assembly (with pre-fitted track) |
| Retaining Stops: | 601H clip stop with adjustable retention (x2) |
| Wall Stop: | 287 rubber buffer (x1) |

POCKET DOOR SYSTEM FOR INTERNAL DOORS

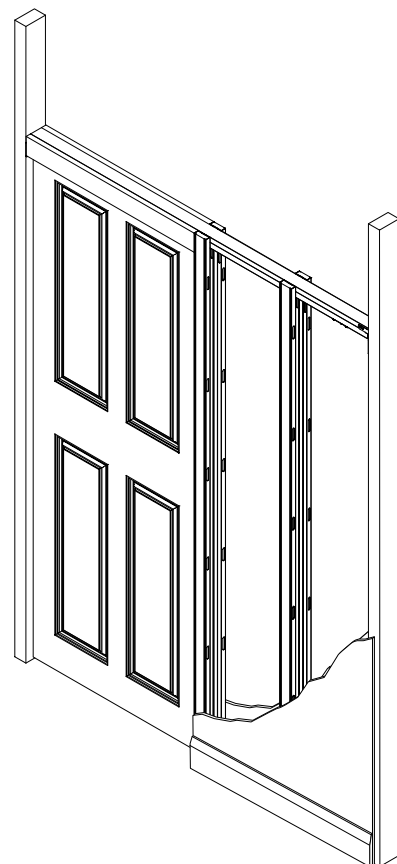

THE POCKET DOOR KIT

| Kit No. | Standard door size | Rough opening height - H | Rough opening width - W |
|---------|--|--------------------------|-------------------------|
| PDK3 | 1981mm (78") high x 762mm (30") wide doors | 2071mm | 1554mm |
| PDK4 | 1981mm (78") high x 838mm (33") wide doors | 2071mm | 1706mm |
| PDK5 | 2040mm high x 762mm wide doors | 2130mm | 1554mm |
| PDK6 | 2040mm high x 826mm wide doors | 2130mm | 1682mm |
| PDK7 | 2040mm high x 726mm wide doors | 2130mm | 1482mm |
| PDK10 | 2315mm high x 930mm wide doors | 2405mm | 1890mm |

