

Precision-made, satin-anodised finish aluminium gear for sliding glass doors for domestic and commercial displays, eg. bookshelves, cabinets and hatches. The silent top guide incorporates brushpile strips. The bottom roller incorporates a precision bearing unique to Henderson. Double or multiple lines of track can be fitted.

KITS

Standard kits for 2 doors contain: top guide, glazing strip, 2 glass rails, 4 nylon tyred bottom rollers, bottom rail, end caps, screws and fixing instructions.

OPTIONAL EXTRAS


Optional extras include: finger-pull (no.27) and cylinder lock (no. 507RH or 507LH) (see pp 52-57 for full product description). Bulk component packs are also available.

INSTALLATION NOTES

(also see drawing)

For standard 6mm glass, maximum weight 25kg (1m²) per panel, maximum width 900mm per panel (not less than half panel height).

For opening widths to	2 door kit no.
1200mm	Z12
1500mm	Z15
1800mm	Z18
Max leaf size	1m² (Max width 900mm)
Max leaf weight	25kg

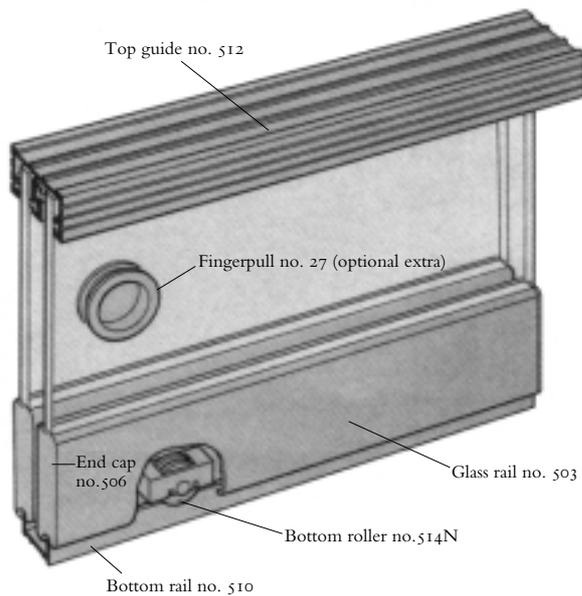

(See Component/Accessory pp 52-56 for product descriptions)

SOFFIT FIXED

